







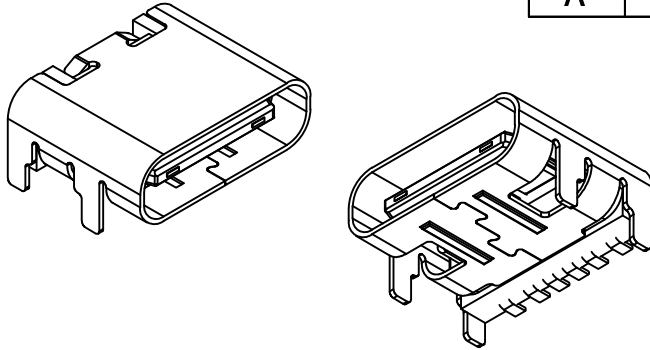


NOTE:
备 注:
1. MATERIAL SPECIFICATION:
1. 材 料 规 格 :
1-1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
1 - 1. 胶 芯 材 料: 高 温 塑 胶, 防 火 等 级 UL94 V-0
1-2. TERMINAL: COPPER ALLOY
1 - 2. 端 子 材 料: 铜 合 金
1-3. FRONT SHELL: STAINLESS STEEL
1 - 3. 外 壳 材 料: 不 锈 钢
1-4. MID PLATE: STAINLESS STEEL
1 - 4. 中 夹 片: 不 锈 钢
2. PLATING SPECIFICATION:
2. 电 镀 规 格:
2-1. TERMINAL:
2 - 1. 端 子:
Ni 50u" MIN. UNDER PLATED OVER ALL.
镀 镍 底 50u" MIN.
Au PLATED 0.5~1u" OVER Ni
表 面 刷 金 0.5~1u"
2-2. FRONT SHELL:
2 - 2. 外 壳 :
Ni 50u" MIN. PLATED OVER ALL.
镀 镍 底 50u" MIN.
3. MECHANICAL PERFORMANCE,
3. 机 械 性 能 ,
3-1. INSERTION FORCE: 0.5~2.0kgf.
3 - 1. 插 入 力: 0.5~2.0kgf.
3-2. REMOVAL FORCE: 0.6kgf~2.0kgf.
3 - 2. 拔 出 力: 0.6kgf~2.0kgf.
3-3. DURABILITY: 10000 CYCLES.
3 - 3. 插 拔 寿 命: 10000次.
4. ELECTRICAL PERFORMANCE,
4. 电 气 性 能 ,
4-1. VOLTAGE RATING: 5.0V DC/AC
4 - 1. 额 定 电 压 : 5.0V DC/AC
CURRENT RATING: 2.0A
额 定 电 流 : 2.0A
4-2. LLCR: 50mΩ /PIN MAX.
4 - 2. 接 触 阻 抗 : 50mΩ /PIN MAX.
4-3. INSULATION RESISTANCE: 100MΩ MIN
4 - 3. 绝 缘 阻 抗 : 100MΩ MIN
4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
4 - 4. 耐 电 压 : AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
5. 环 境 特 性 :
OPERATING TEMPERATURE: -25° C~+85° C.
工 作 温 度 : -25° C~+85° C.

PIN ASSIGNMENTS

A1	GND	B9	VBUS
A5	CC1	B5	CC2
A12	GND	B4	VBUS
PIN	SIGNAL NAME	PIN	SIGNAL NAME


CUSTOMER DRAWING			铭创科技（东莞）有限公司			
UNITS mm	SCALE 1:1	SHEET 1 OF 2	Mingchuang Technology (Dongguan) Co., Ltd.			
PROJECTION: 		DRAW: DAP	TITLE TYPE C母座6PIN 2.0新款 板上四脚插板SMT L=6.8			
GENERAL TOLERANCE 0. ±0.30 0.0 ±0.20 0.00 ±0.10 0. ° ±10° 0.0° ±8°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE	
		APPD: HHM	DWG. NO. 1612. TCF. 6BS. H97		PART NO. _____	SIZE A4

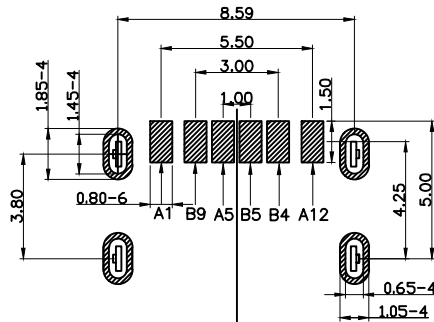






RECOMMENDED P. C. B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2024. 03. 02	HHM

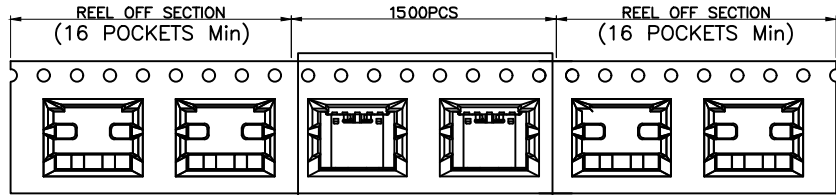


SEE DETAIL X

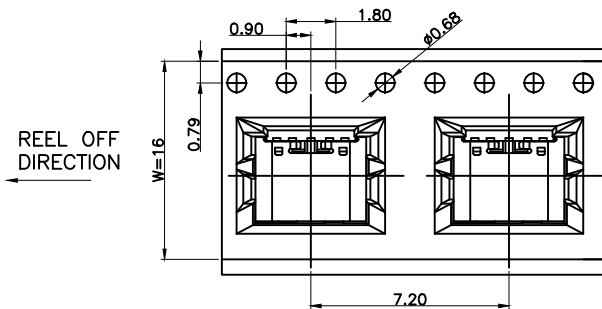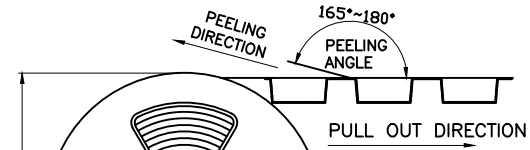



REEL AND TAPE

REEL AND TAPE




TAPE & REEL 15 PCS

1 REEL
= 1500 PCS

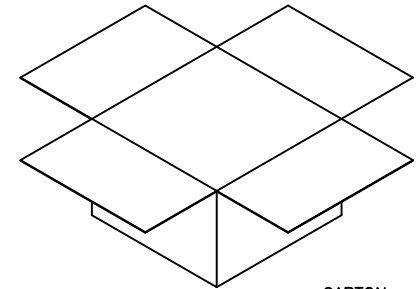

CARTON

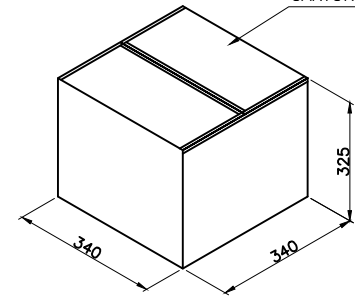

	REEL	CARTON
CONNECTOR (PCS)	1500	15000

CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd.		
UNITS mm	SCALE 1:1	SHEET 2 OF 2	TITLE TYPE C母座6PIN 2.0新款 板上四脚插板SMT L=6.8		
PROJECTION: 	DRAW: DAP		MAT'L SEE TABLE		
GENERAL TOLERANCE 0. ±0.30 0.0 ±0.20 0.00 ±0.10 0.° ±10° 0.0° ±8°	CHECK: HWT		FINISH SEE TABLE		
	APPD: HHM		DWG. NO. 1612. TCF. 6BS. H97		
			PART NO.	SIZE A4	