
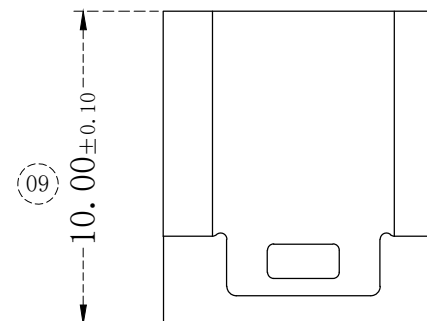



REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2020. 11. 06	HHM

备注:

- 电气测试:
 - 1.1接触抗阻: $30\text{m}\Omega$ MAX, 寿命后变化 $\pm 10\text{m}\Omega$
 - 1.2耐电压: 100V AC
 - 1.3绝缘阻抗: $1000\text{M}\Omega$ MIN
 - 1.4额定电流 3A
- 机械测试:
 - 2.1耐久测试: 2000次;
 - 2.2插入力: 20N Max ;
 - 2.3拔出力: 6N Min ;
- 包装:
 - 3.1 PE袋包装, 最小包装量1000PCS
- 环境:
 - 4.1工作温度: $-55^{\circ}\text{C}\sim+88^{\circ}\text{C}$

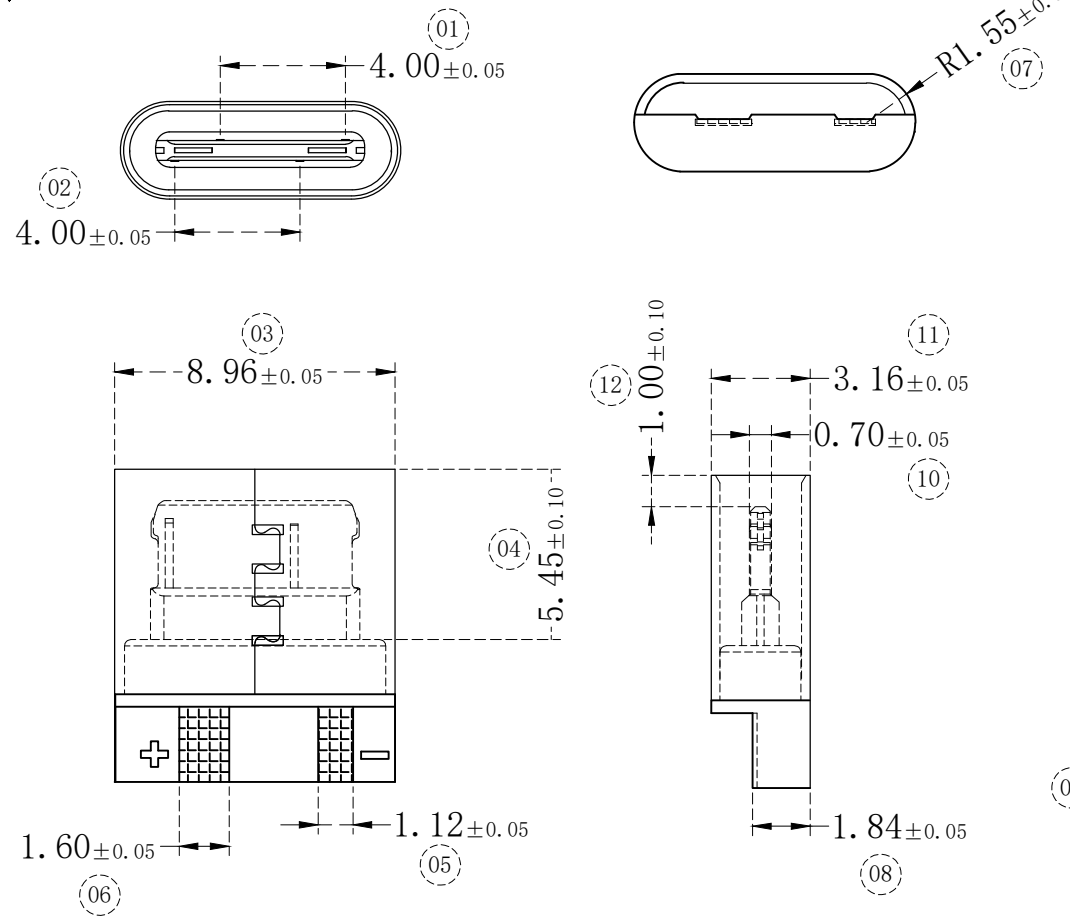

接点定义放大图(2P)

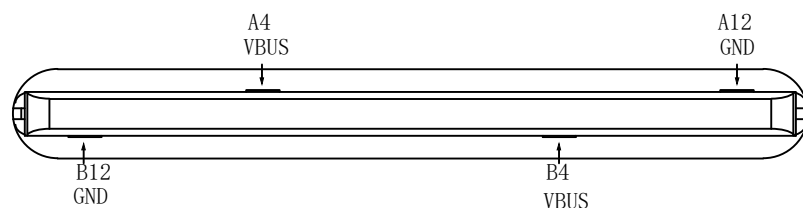

CUSTOMER DRAWING			铭创科技(东莞)有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		DRAW: DAP	TITLE TYPE-C 母座2PIN 焊线式L=10.0		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE	FINISH SEE TABLE	
		APPD: HHM	DWG. NO. 0298. TCF. 2HX. J72	PART NO. _____	SIZE A4