



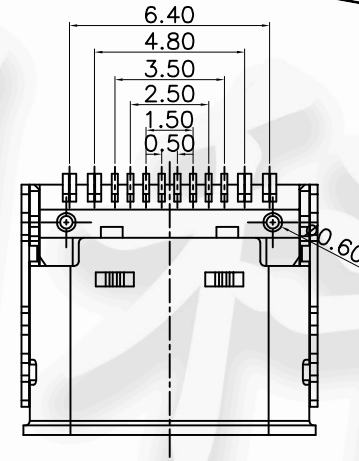

REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2020.11.06	HHM

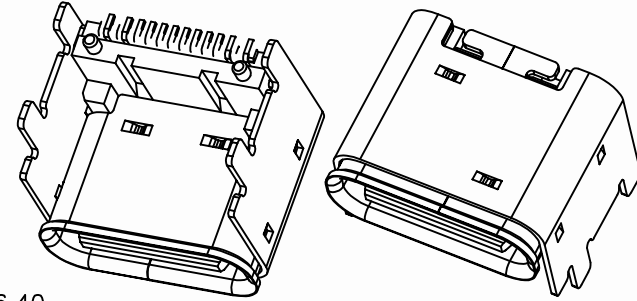

NOTES:

- MECHANICAL: MATING FORCE: 5-20N .
UNMATING FORCE: 8-20N .
DURABILITY: 10000 CYCLES MIN.
- ELECTRICAL:
CURRENT: 5.0A MAX
VOLTAGE: 20V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
50 mΩ MAX AFTER 10000 CYCLES
- ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE -30° C ~ +80° C
- Salt Spray: 24H

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-	SBU1	VBUS			GND
GND			VBUS	SBU2	D-	D+	CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 	DRAW: DAP		TITLE TYPE C 16PIN 板上接高4.3 CH=5.9		
GENERAL TOLERANCE 0. ±0.10 0.0 ±0.05 0.00 ±0.02 0.° ±4° 0.0° ±3°	CHECK: HWT		MAT'L SEE TABLE		FINISH SEE TABLE
	APPD: HHM		DWG. NO. 0320.TCF.16DG.J3		PART NO. _____
					SIZE A4

