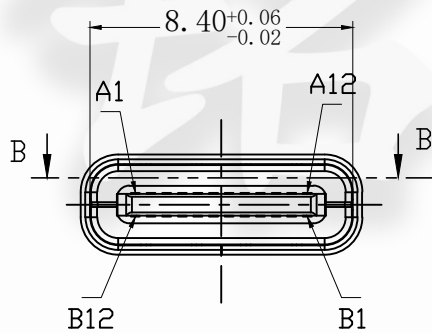

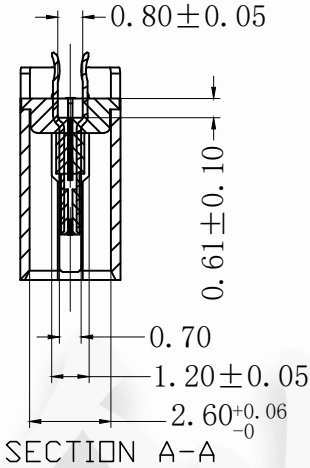
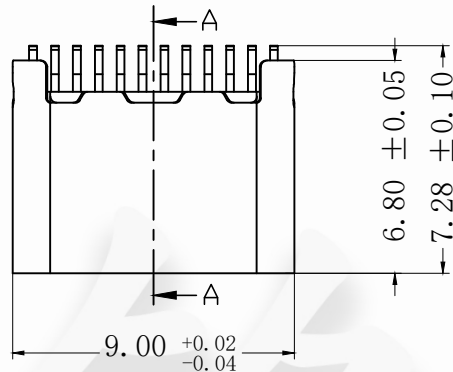


备注:

1.材质:

1.1胶芯: LCP+30%G.F UL94V-0

1.2端子: 磷铜, T=0.15mm; 镍底80μ", 镀金1μ"

1.3接地片: 不锈钢, T=0.15mm; 表面镀镍50μ"

1.4外壳: 不锈钢, T=0.30mm; 表面镀镍100μ"

2.主要特性:

2.1额定电流: 3.0A

2.2接触阻抗: 40mΩ MAX

2.3绝缘阻抗: 100MΩ MIN 250V DC

2.4耐压测试: 100V AC



2.5沾锡性: 温度250±5℃, 时间5±0.5s

2.6整体插入力: 2.0kgf MAX

整体拔出力: 0.6kgf MIN

2.7使用寿命: 10000次

2.8工作温度: -30℃~+80℃

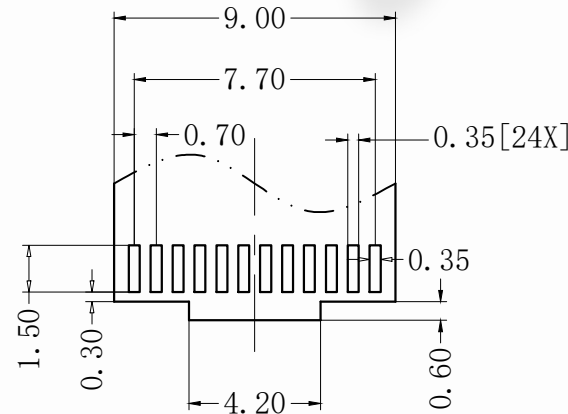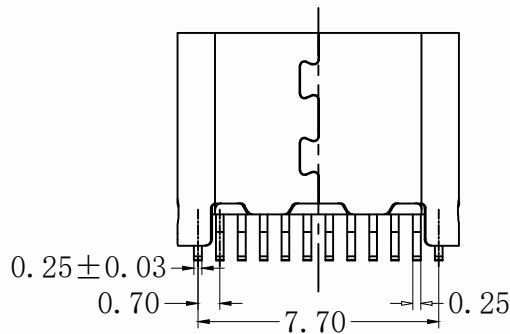

RECOMMENDED P.C.B. LAYOUT
T=0.8 ±0.05mm

CUSTOMER DRAWING			铭创科技(东莞)有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		DRAW: DAP	TITLE TYPE-C 夹板母座24PIN 夹板0.8 L=5.8		
GENERAL TOLERANCE 0. ±0.20 0.0 ±0.15 0.00 ±0.10 0.° ±0.5° 0.0° ±0.2°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. 0353. TCF. 24JB. X92	PART NO. _____	SIZE A4