
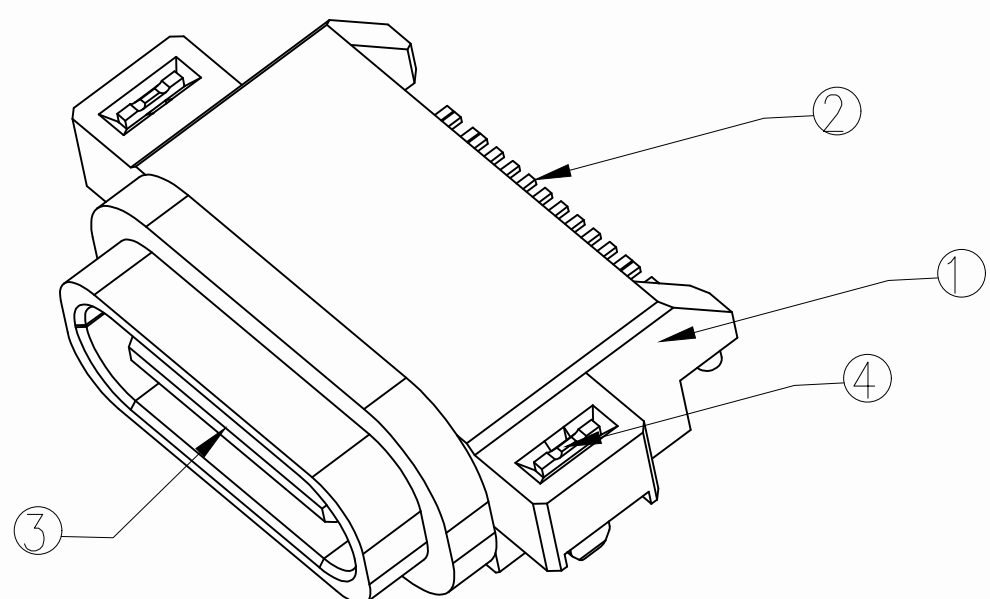
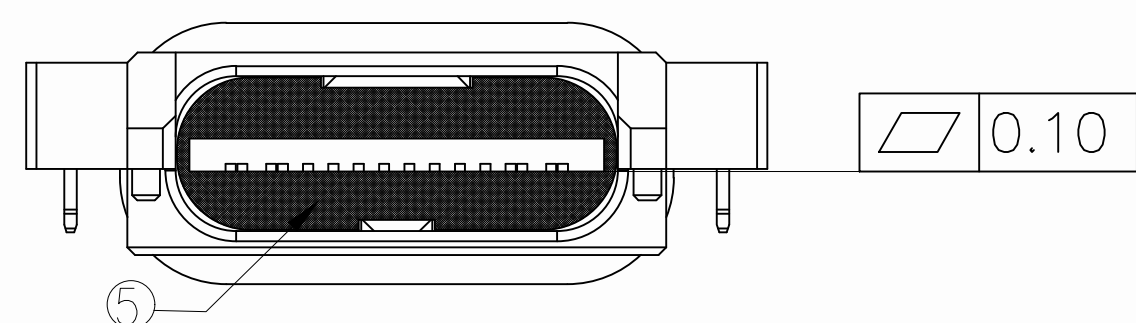
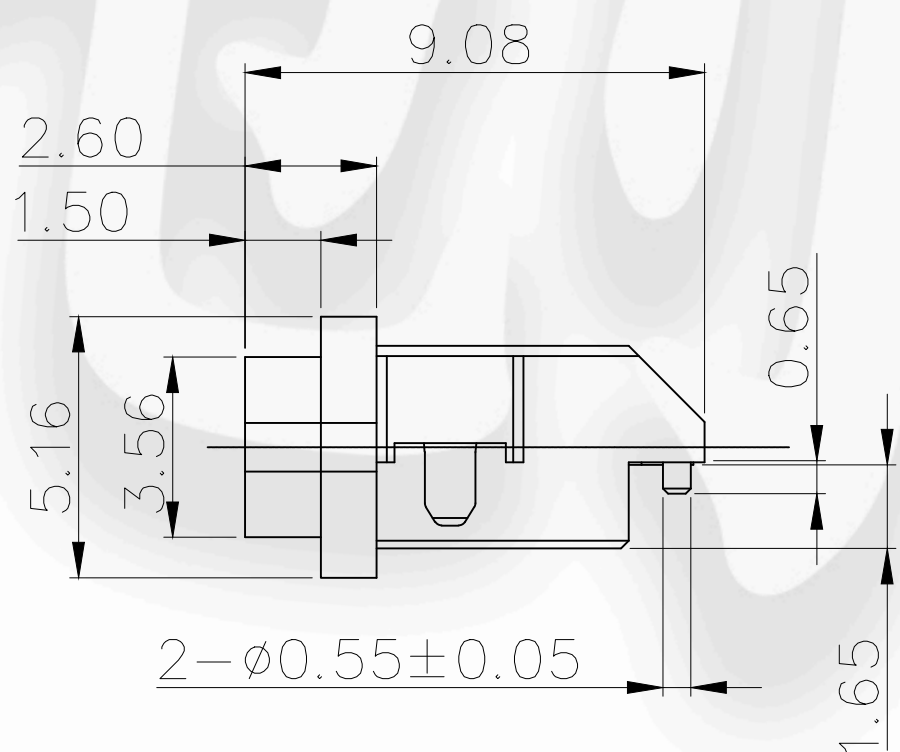
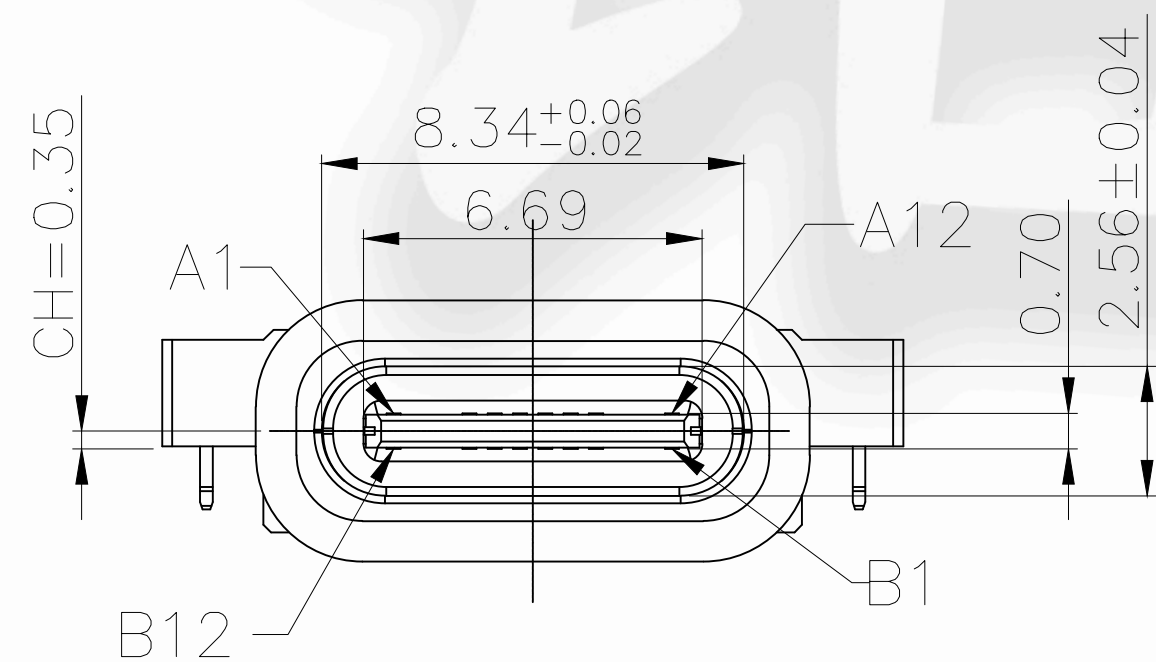
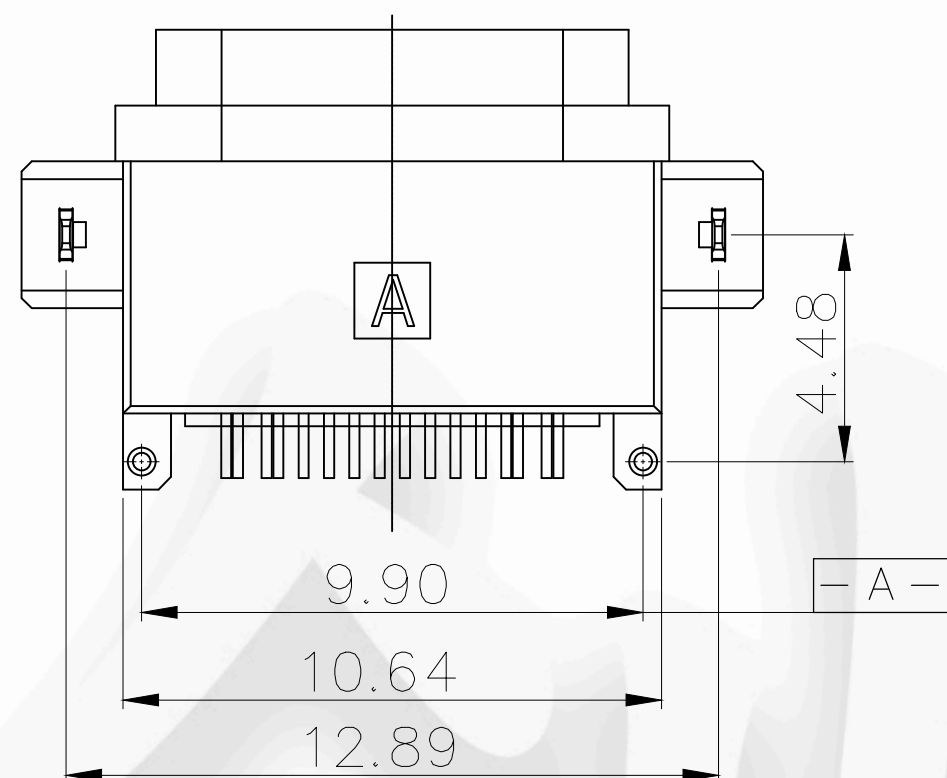


REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2020. 11. 06	HHM


NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES

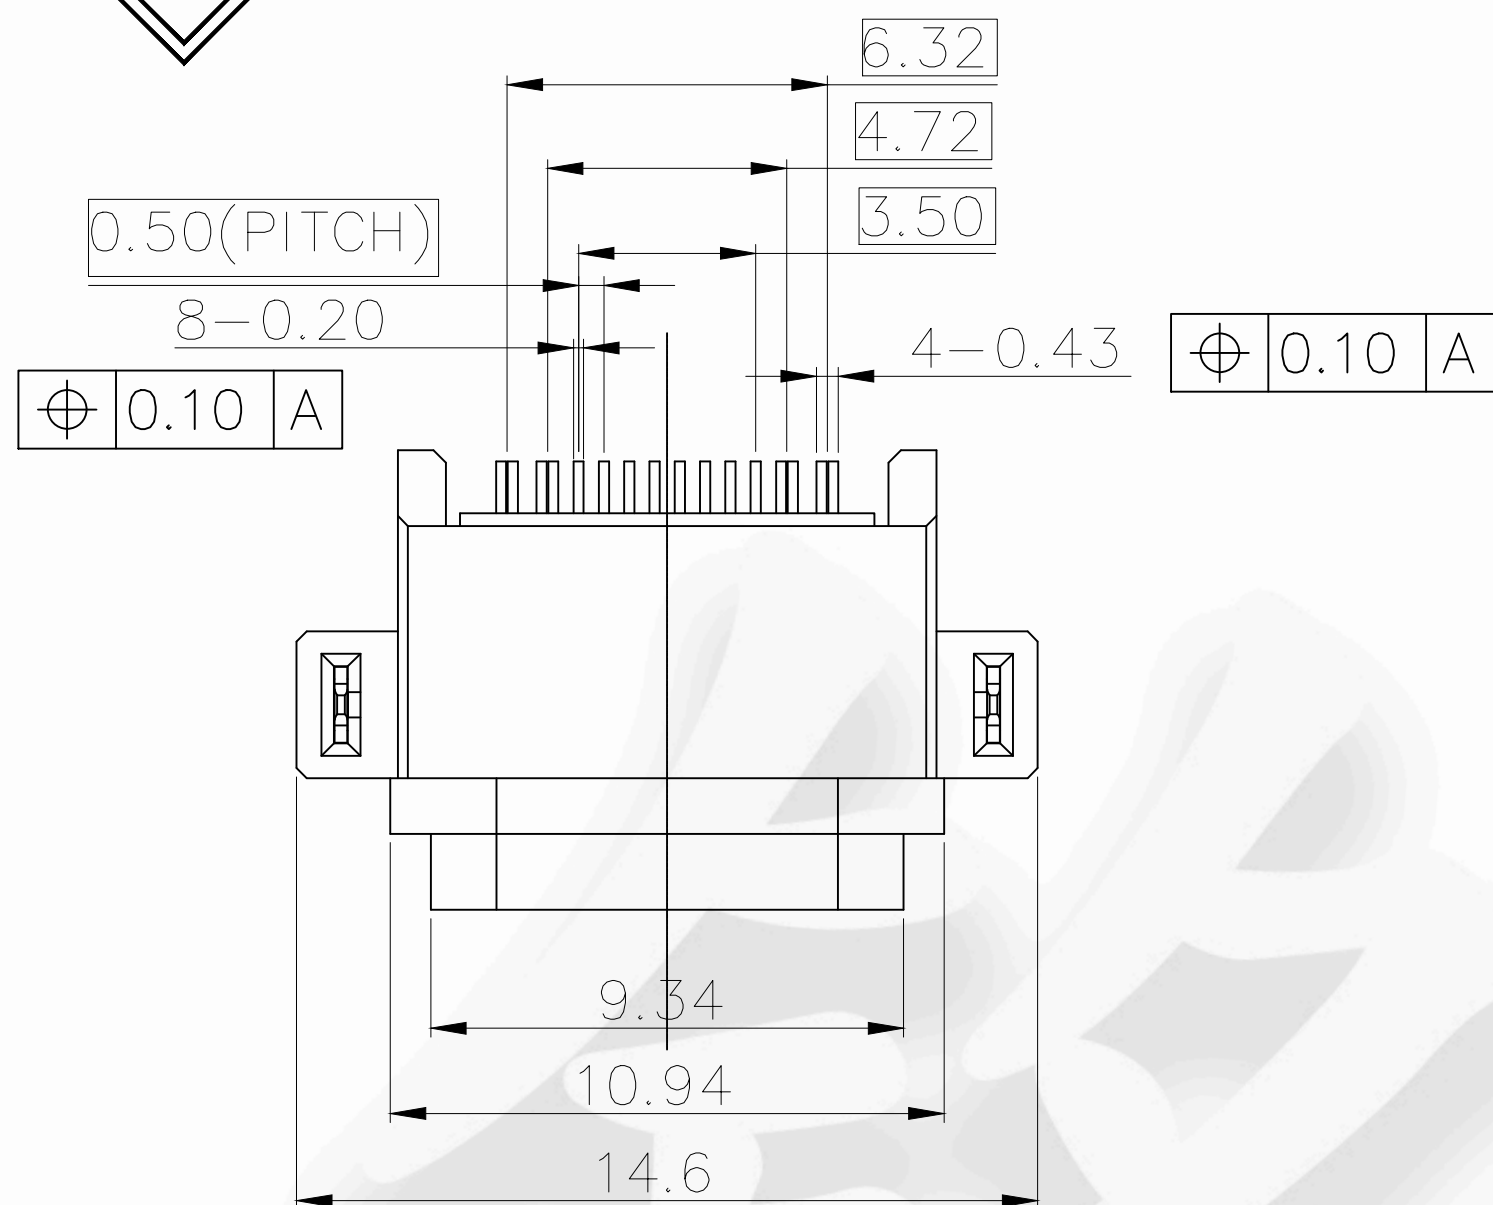

5	Epoxy			BLACK
4	Contact 3	2	SUS304 1/2H	Ni Plating T=0.25mm
3	Housing 2	1	PA10T (G.F30%)	BLACK
2	Contact 1&2	16	Phosphor bronze C5191R-EH	Au3u"Plating T=0.15mm
1	Housing 1	1	PA10T (G.F30%)	BLACK
ITEM PART NAME Q'TY		FINISH		NOTE

CUSTOMER DRAWING			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd.		
UNITS mm	SCALE 1:1	SHEET			
PROJECTION: 		DRAW: DAP	TITLE 防水TYPE C母座16PIN 沉板1.65全塑 L=9.0		
GENERAL TOLERANCE 0. ±0.50 0.0 ±0.30 0.00 ±0.20 0.° ±2° 0.0° ±1°		CHECK: HWT			
		APPD: HHM	MAT'L SEE TABLE		FINISH SEE TABLE
			DWG. NO. 0501. WPCF. 16CB. B9		PART NO. _____ SIZE A4