REV	DESCRIPTION	DATE	APPROVED
A	新板发行	2020.12.16	HHM

ROHS Compliant REACH



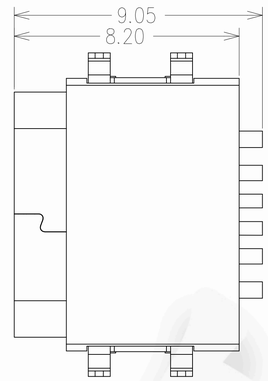

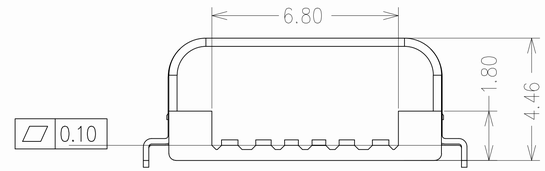

NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30° C~+85° C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. LNSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N-20N
8. DURABILITY: 10000 CYCLES
9. WATER PROOFNESS:THISPRODUCTIS BASED ON IPX7.

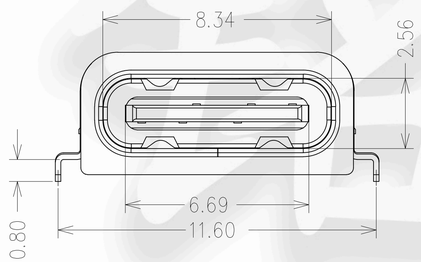



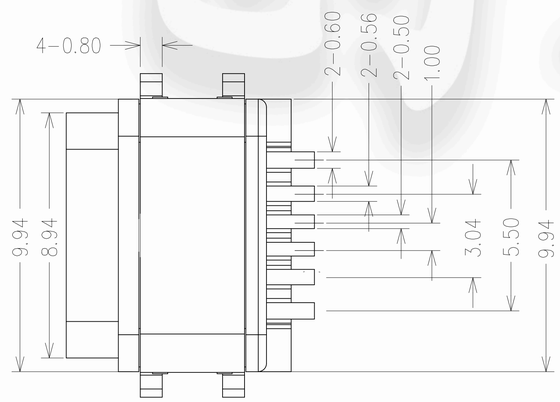

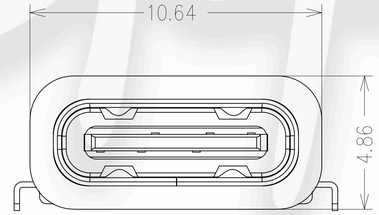

加防水圈示意图



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

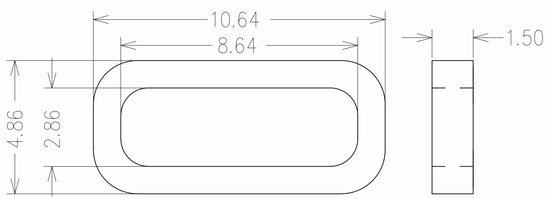

建议的胶圈尺寸

CUSTOMER DRAWING

UNITS	SCALE	SHEET
mm	1:1	1 OF 1

PROJECTION:

DRAW: DAP

GENERAL TOLERANCE
0. ±0.30
0.0 ±0.15
0.00 ±0.10
0.° ±5°
0.0° ±2°

CHECK: HWT

APPD: HHM

铭创科技（东莞）有限公司
Mingchuang Technology (Dongguan) Co., Ltd

TITLE
6PIN 防水TYPE C母座 沉板0.55四脚插板

MAT'L: SEE TABLE

FINISH: SEE TABLE

DWG. NO. 0547.WPCF.6CB.J9

PART NO. _____

SIZE A4