




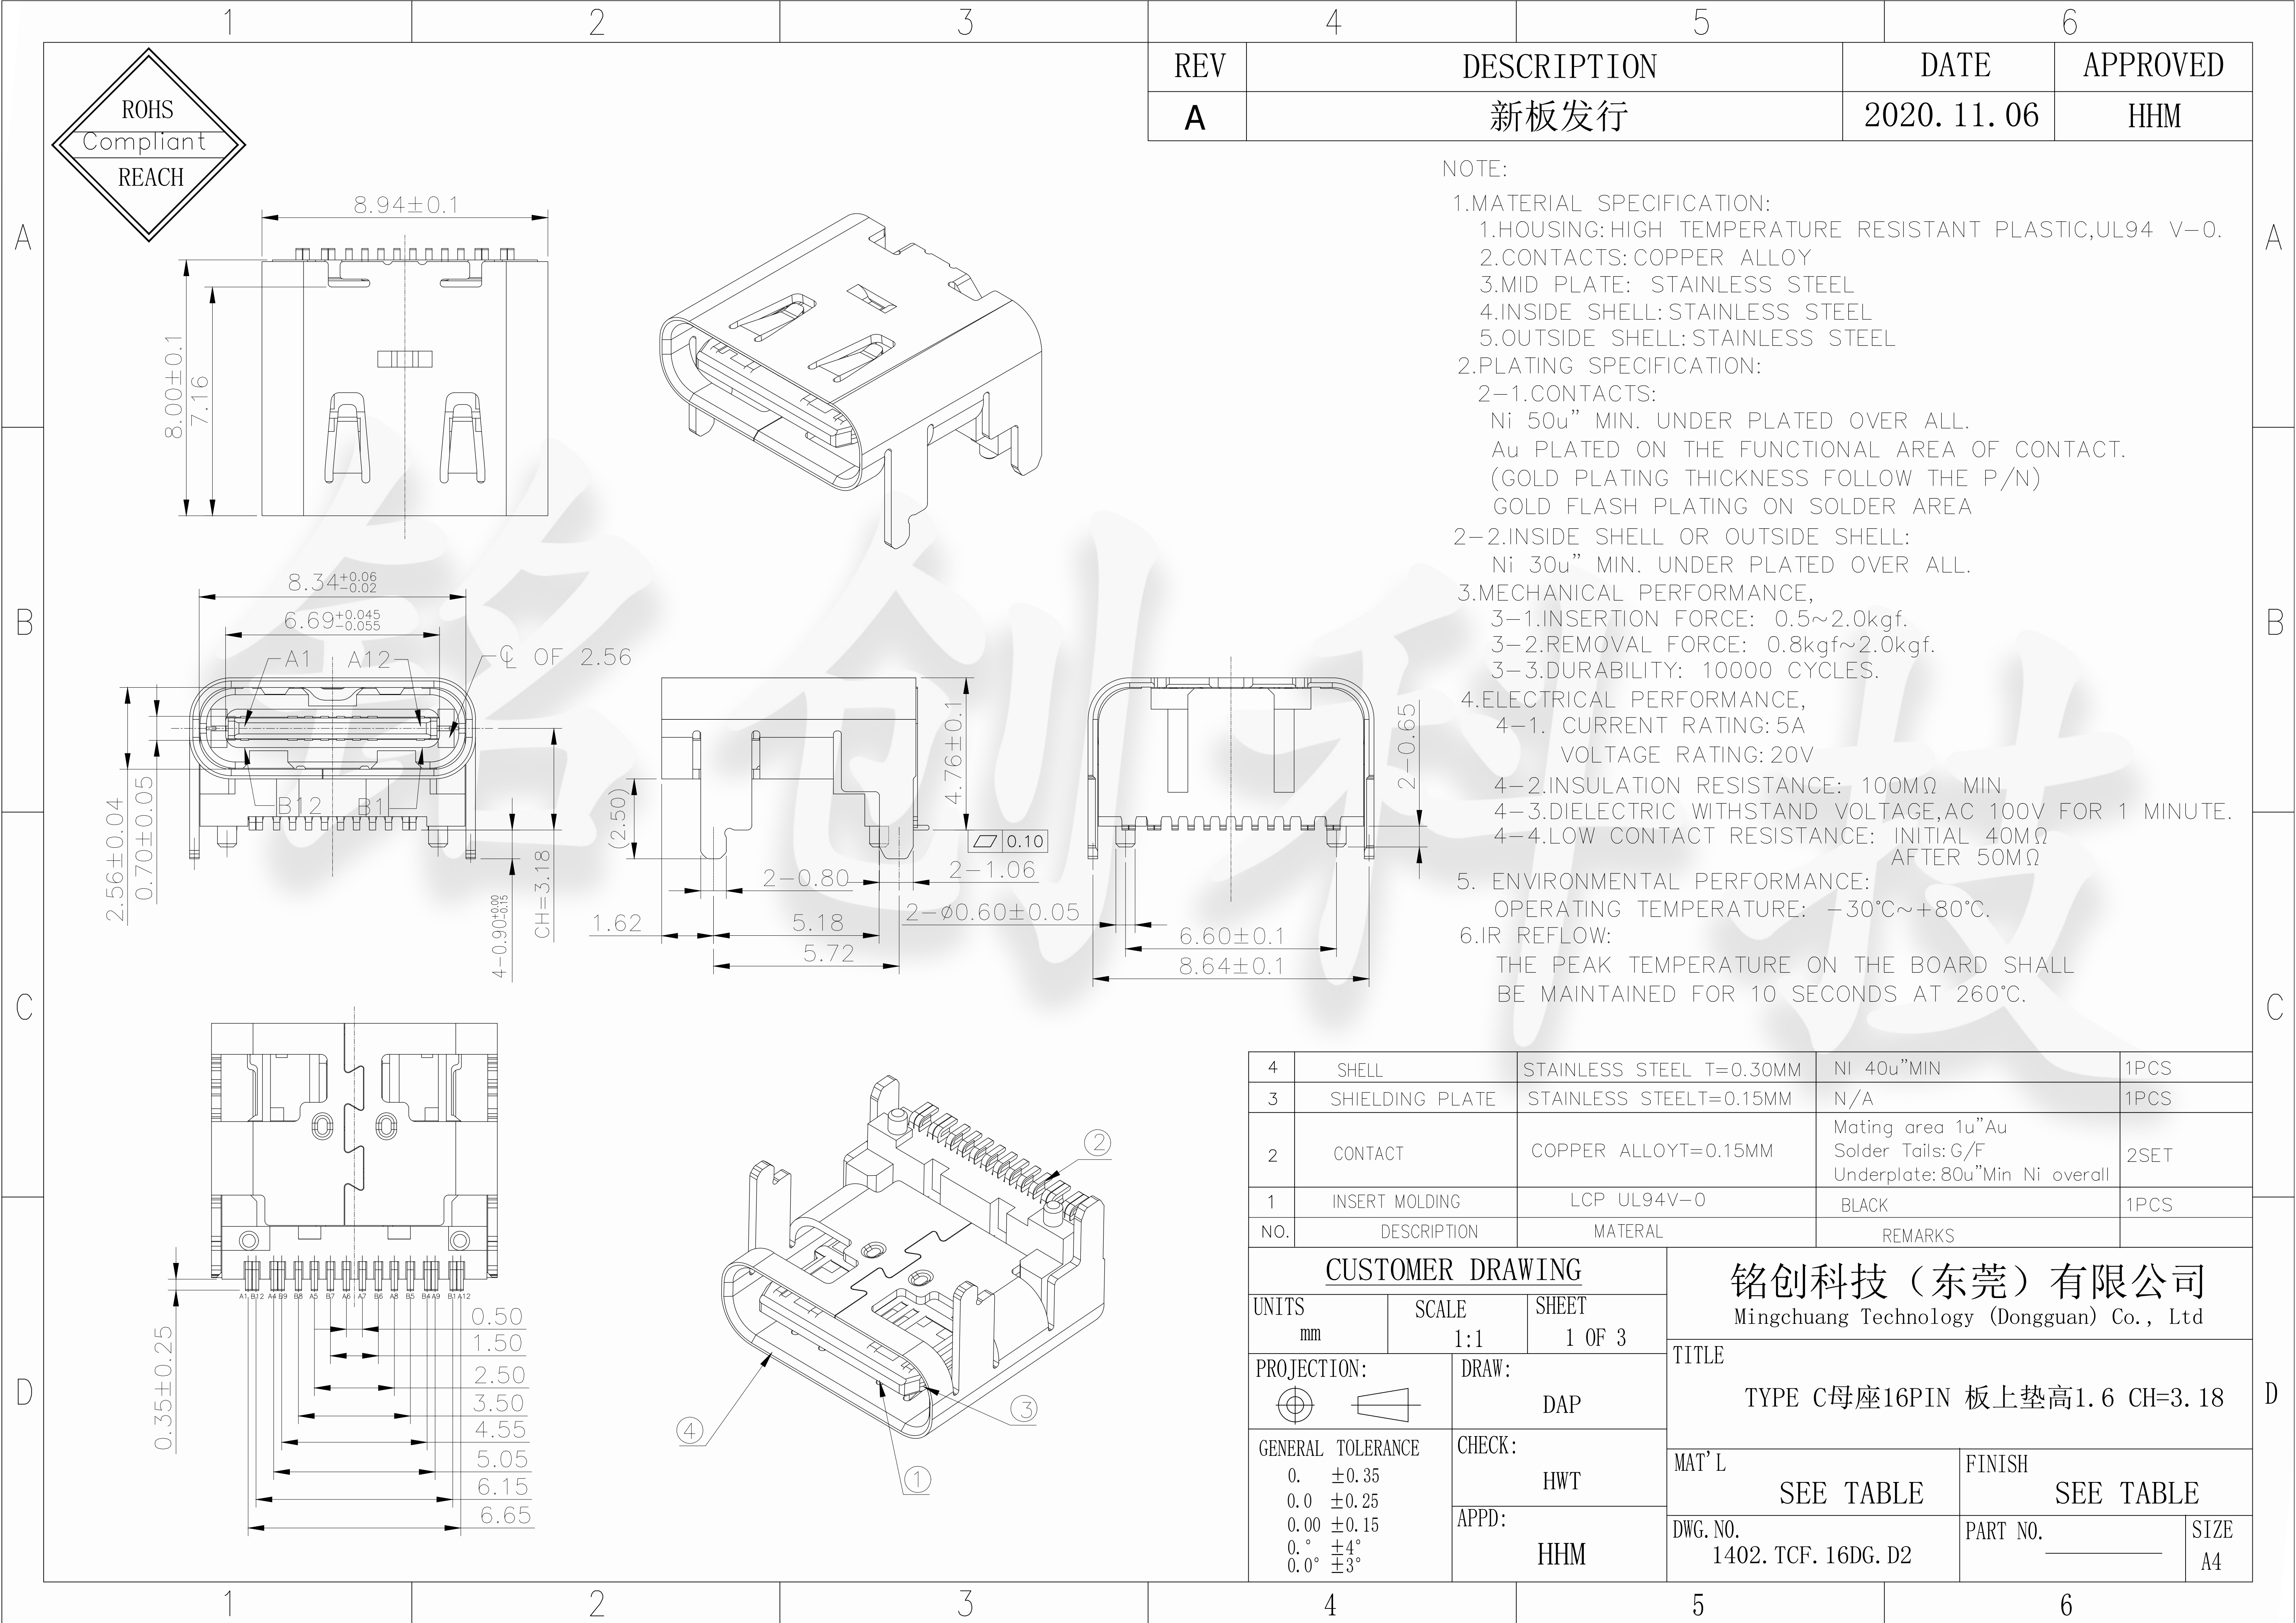


16:16 PIN|


|    |                                                                          |
|----|--------------------------------------------------------------------------|
| 1: | GOLD FLASH PLATING ON CONTACT AREA,<br>GOLD FLASH PLATING ON SOLDER AREA |
| 3: | 3u" GOLD PLATING ON CONTACT AREA,<br>GOLD FLASH PLATING ON SOLDER AREA   |
| 5: | 3u" GOLD PLATING ON CONTACT AREA,<br>GOLD FLASH PLATING ON SOLDER AREA   |


| <i>PIN NUMBER</i> | <i>SIGNAL NAME</i> |
|-------------------|--------------------|
| <i>A1</i>         | <i>GND</i>         |
| <i>A4</i>         | <i>VBUS</i>        |
| <i>A5</i>         | <i>CC1</i>         |
| <i>A6</i>         | <i>Dp1</i>         |
| <i>A7</i>         | <i>Dn1</i>         |
| <i>A8</i>         | <i>SBU1</i>        |
| <i>A9</i>         | <i>VBUS</i>        |
| <i>A12</i>        | <i>GND</i>         |

| <i>PIN NUMBER</i> | <i>SIGNAL NAME</i> |
|-------------------|--------------------|
| <i>B12</i>        | <i>GND</i>         |
| <i>B9</i>         | <i>VBUS</i>        |
| <i>B8</i>         | <i>SBU2</i>        |
| <i>B7</i>         | <i>Dn2</i>         |
| <i>B6</i>         | <i>Dp2</i>         |
| <i>B5</i>         | <i>CC2</i>         |
| <i>B4</i>         | <i>VBUS</i>        |
| <i>B1</i>         | <i>GND</i>         |

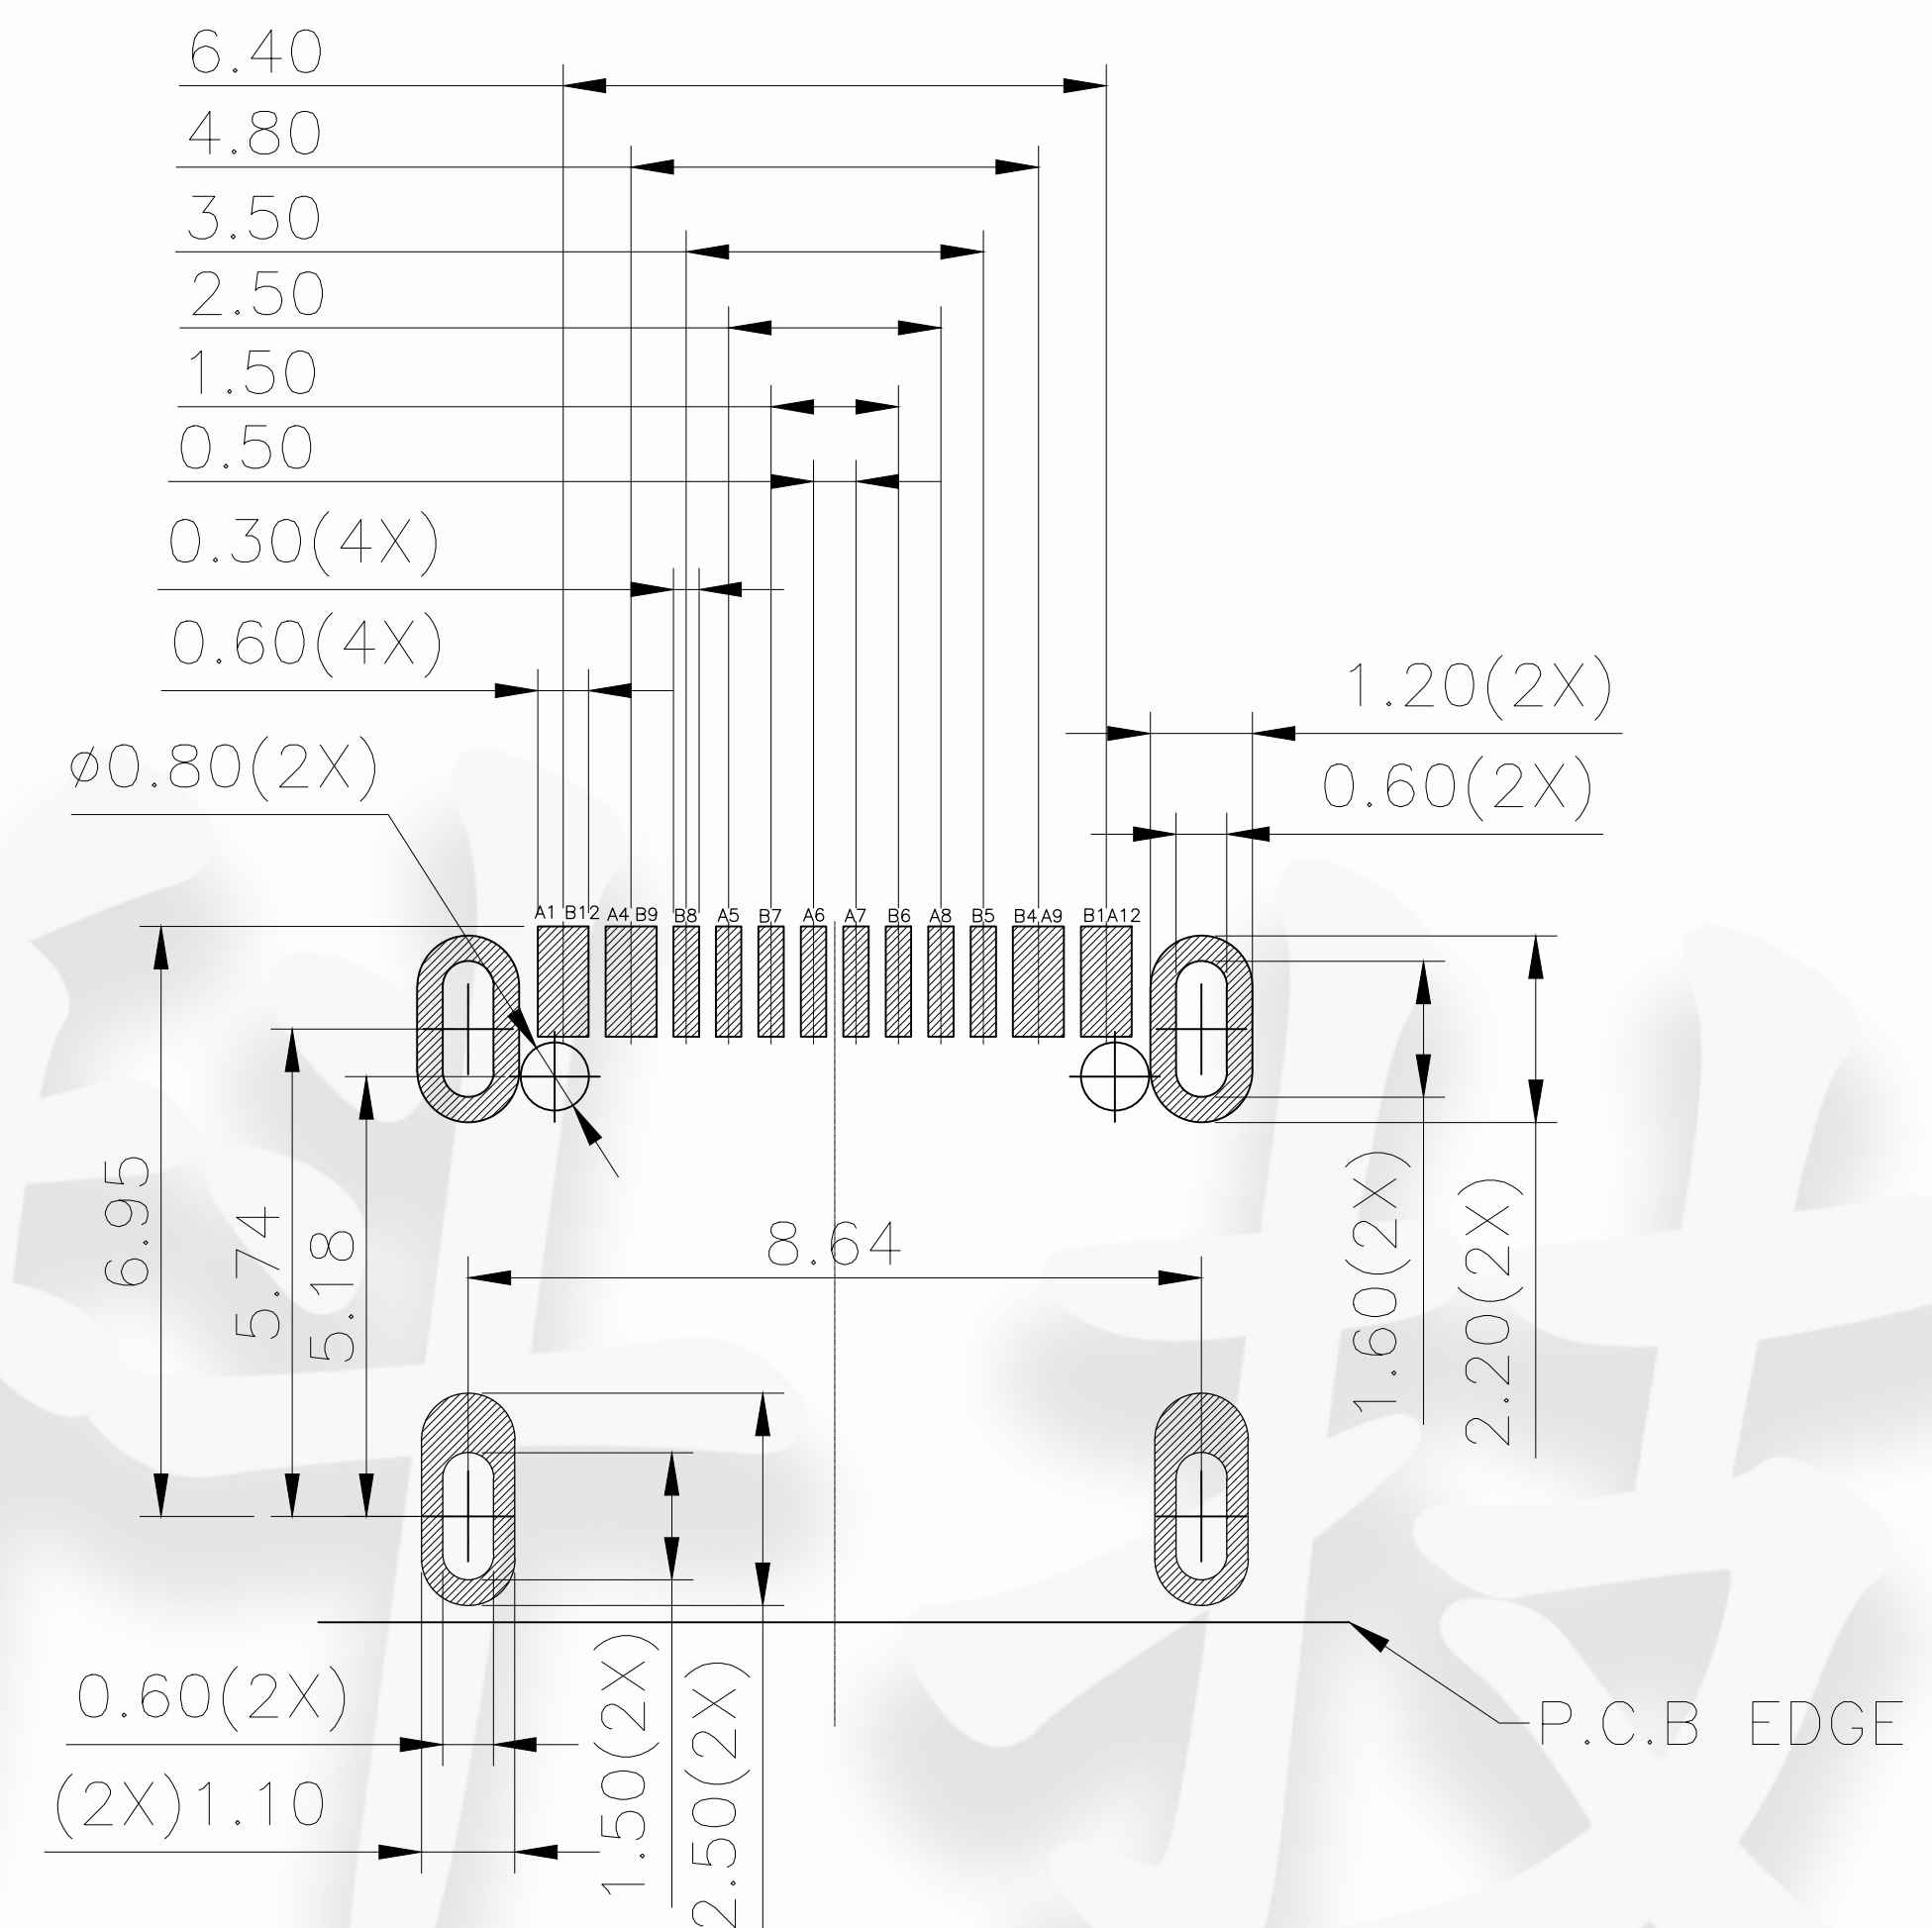D


RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)  
TOLERANCE FOR PCB LAYOUT IS  $\pm 0.05$

|                                                                                                      |              |                   |                                                           |  |                         |            |
|------------------------------------------------------------------------------------------------------|--------------|-------------------|-----------------------------------------------------------|--|-------------------------|------------|
| CUSTOMER DRAWING                                                                                     |              |                   | 铭创科技（东莞）有限公司<br>Mingchuang Technology (Dongguan) Co., Ltd |  |                         |            |
| UNITS<br>mm                                                                                          | SCALE<br>1:1 | SHEET<br>2 OF 3   | TITLE<br><br>TYPE C母座16PIN 板上垫高1.6 CH=3.18                |  |                         |            |
| PROJECTION:<br> |              | DRAW:<br><br>DAP  |                                                           |  |                         |            |
| GENERAL TOLERANCE<br>0. ±0.35<br>0.0 ±0.25<br>0.00 ±0.15<br>0. ° ±4°<br>0.0° ±3°                     |              | CHECK:<br><br>HWT | MAT' L<br><br>SEE TABLE                                   |  | FINISH<br><br>SEE TABLE |            |
|                                                                                                      |              | APPD:<br><br>HHM  | DWG. NO.<br>1402. TCF. 16DG. D2                           |  | PART NO. _____          | SIZE<br>A4 |

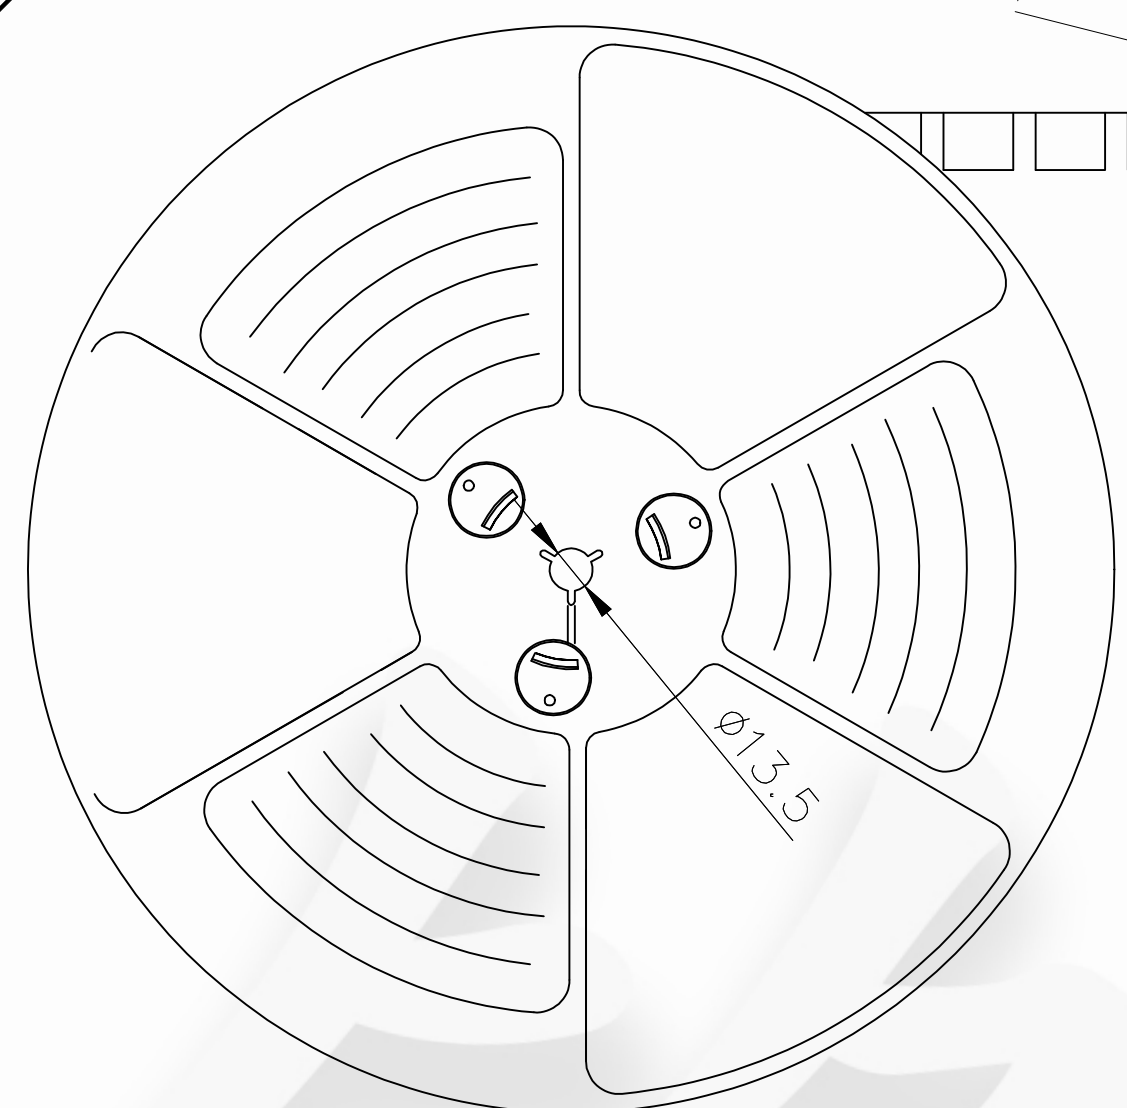

Technical drawing of a 600PCS product layout. The drawing shows a row of 12 units, with a central section labeled "600PCS 产品" and two end sections labeled "后空5PCS" and "前空5PCS". The units are arranged in a grid, with dimensions and labels indicating the layout.


PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

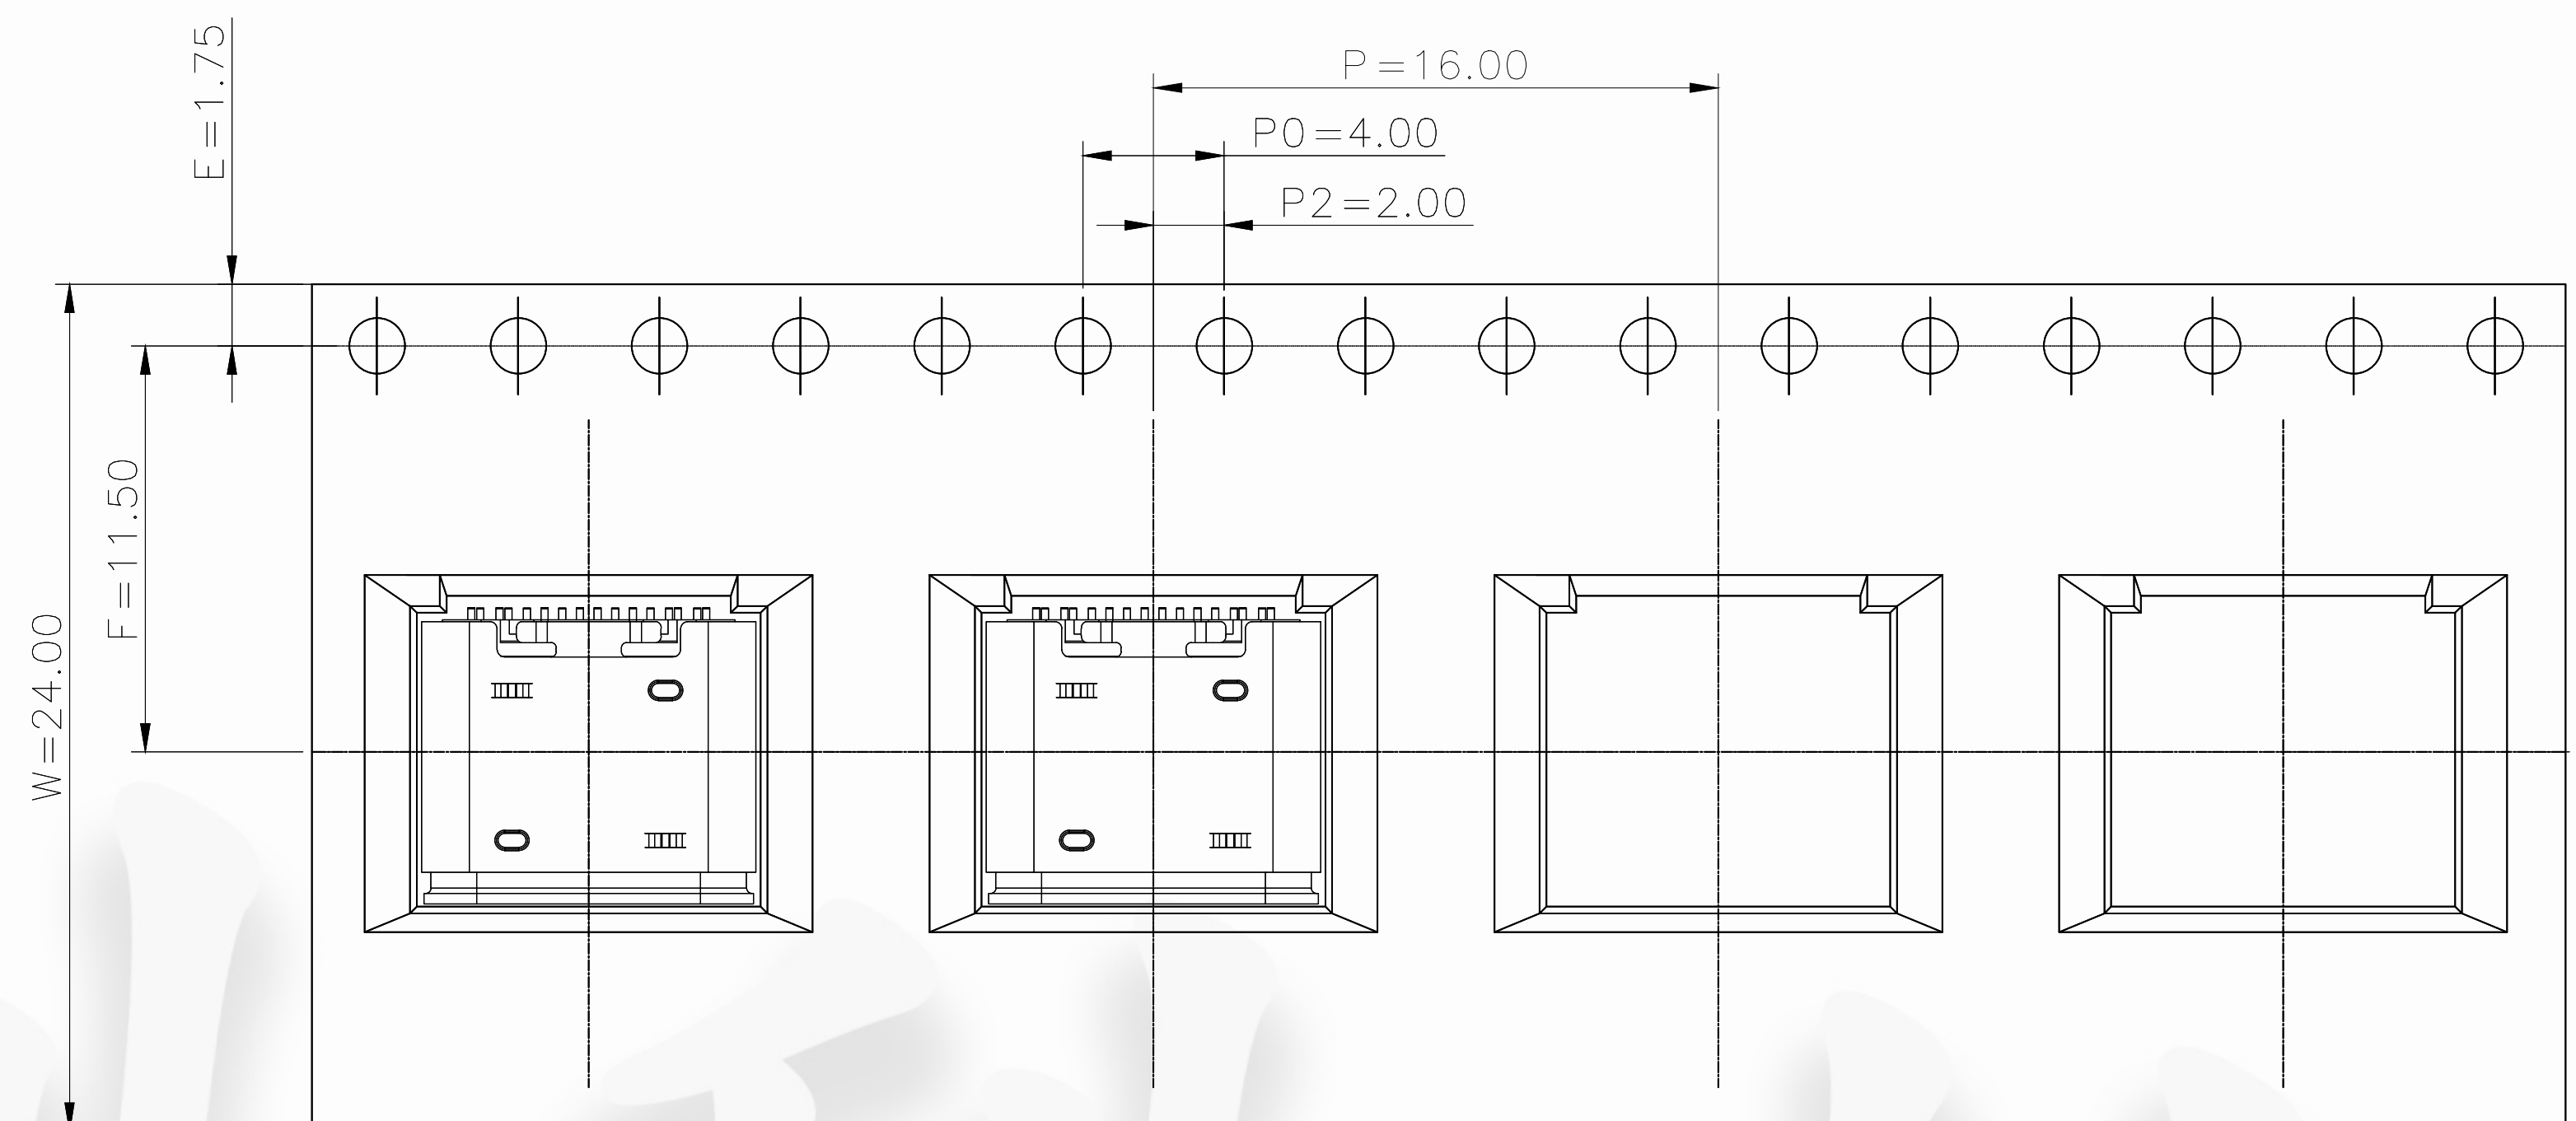

1 REEL  
= 600 PCS

DIMENSIONS:  
39.5X39.5X20

$$\begin{array}{r} 1 \text{ CARTON} \\ \hline = 6 \text{ REELS} \\ = 3600 \text{ PCS} \end{array}$$

|                                                                                                      |              |                   |                                                           |            |                         |
|------------------------------------------------------------------------------------------------------|--------------|-------------------|-----------------------------------------------------------|------------|-------------------------|
| CUSTOMER DRAWING                                                                                     |              |                   | 铭创科技（东莞）有限公司<br>Mingchuang Technology (Dongguan) Co., Ltd |            |                         |
| UNITS<br>mm                                                                                          | SCALE<br>1:1 | SHEET<br>2 OF 3   | TITLE<br><br>TYPE C母座16PIN 板上垫高1.6 CH=3.18                |            |                         |
| PROJECTION:<br> |              | DRAW:<br><br>DAP  |                                                           |            |                         |
| GENERAL TOLERANCE<br>0. ±0.35<br>0.0 ±0.25<br>0.00 ±0.15<br>0. ° ±4°<br>0.0° ±3°                     |              | CHECK:<br><br>HWT | MAT'L<br><br>SEE TABLE                                    |            | FINISH<br><br>SEE TABLE |
|                                                                                                      |              | APPD:<br><br>HHM  | DWG. NO.<br>1402. TCF. 16DG. D2                           |            | PART NO. _____          |
|                                                                                                      |              |                   |                                                           | SIZE<br>A4 |                         |
|                                                                                                      |              |                   |                                                           |            |                         |

1