



REV	DESCRIPTION	DATE	APPROVED
A	新版发行	2018.06.22	HHM

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levot
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:




1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.75kgf (MAX)
Unmate force:1.02kgf (MIN)
2. 端子保持力: Terminal Retenion
1.2kgf (MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Thermaplastics,
U1 94V-0 LCP BLUE
2. 端子:Contact:Copper Alloy C2680 0.25
3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

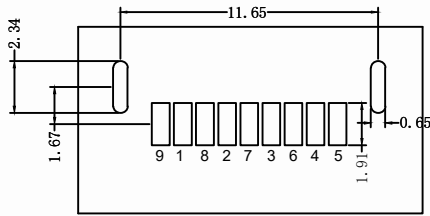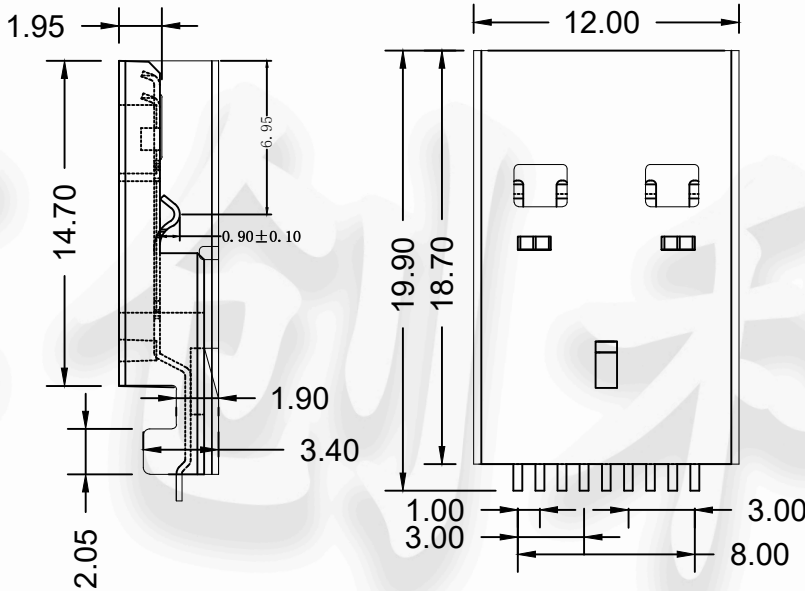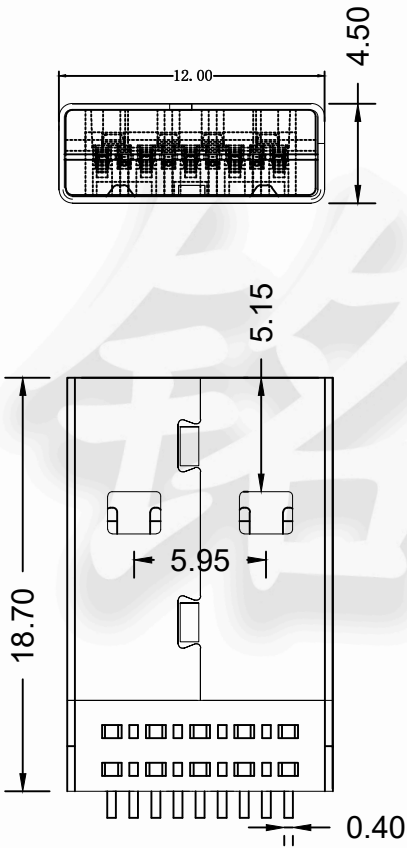

PCB

Pin Number	Signal Name	Pin Number	Signal Name
1	VBUS	5	SSTX-
2	D-	6	SSTX+
3	D+	7	GND
4	GND	8	SSRX-
Shell	Shield	9	SSRX+

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		DRAW: DAP	TITLE USB AM3.0 90度沉板公头直脚无柱DIP		
GENERAL TOLERANCE 0. ±0.30 0.0 ±0.20 0.00 ±0.10 0.° ±2° 0.0° ±0.5°		CHECK: HWT	MAT'L SEE TABLE	FINISH SEE TABLE	
		APPD: HHM	DWG. NO. 1424. 3AM. CB. G3	PART NO. _____	SIZE A4