

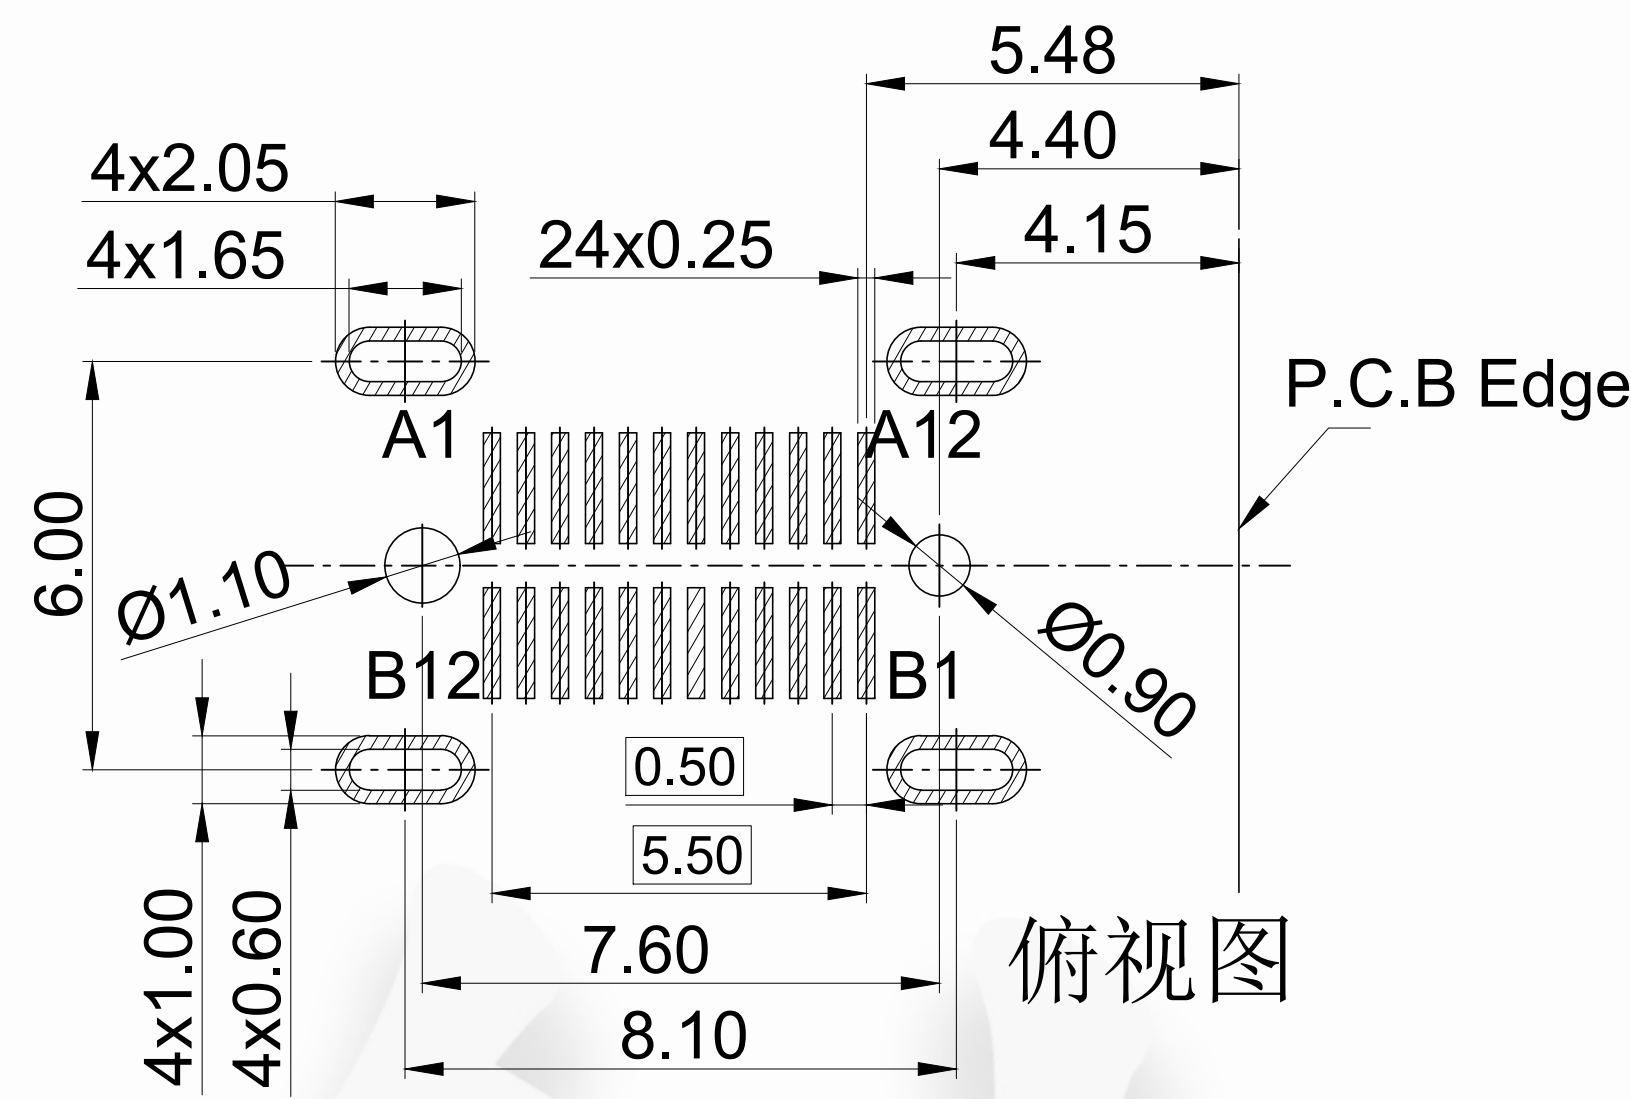


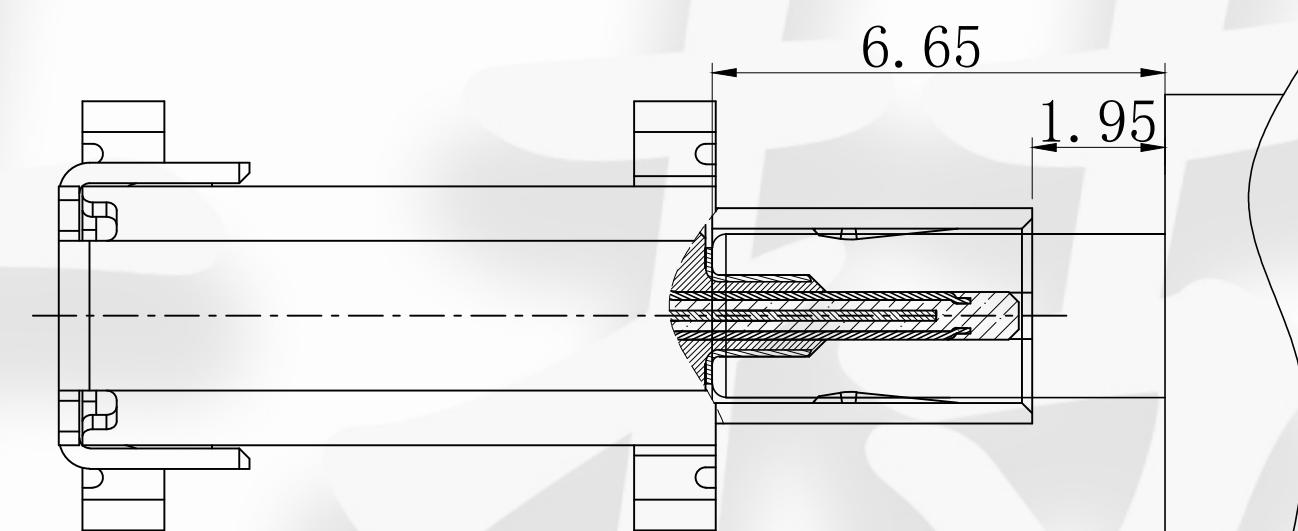



SPECIFICATION:

1. CURRENT RATING: 5.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. Salt spray: 24H
10. MARK" (XX) " ARE FAI DIMENSION

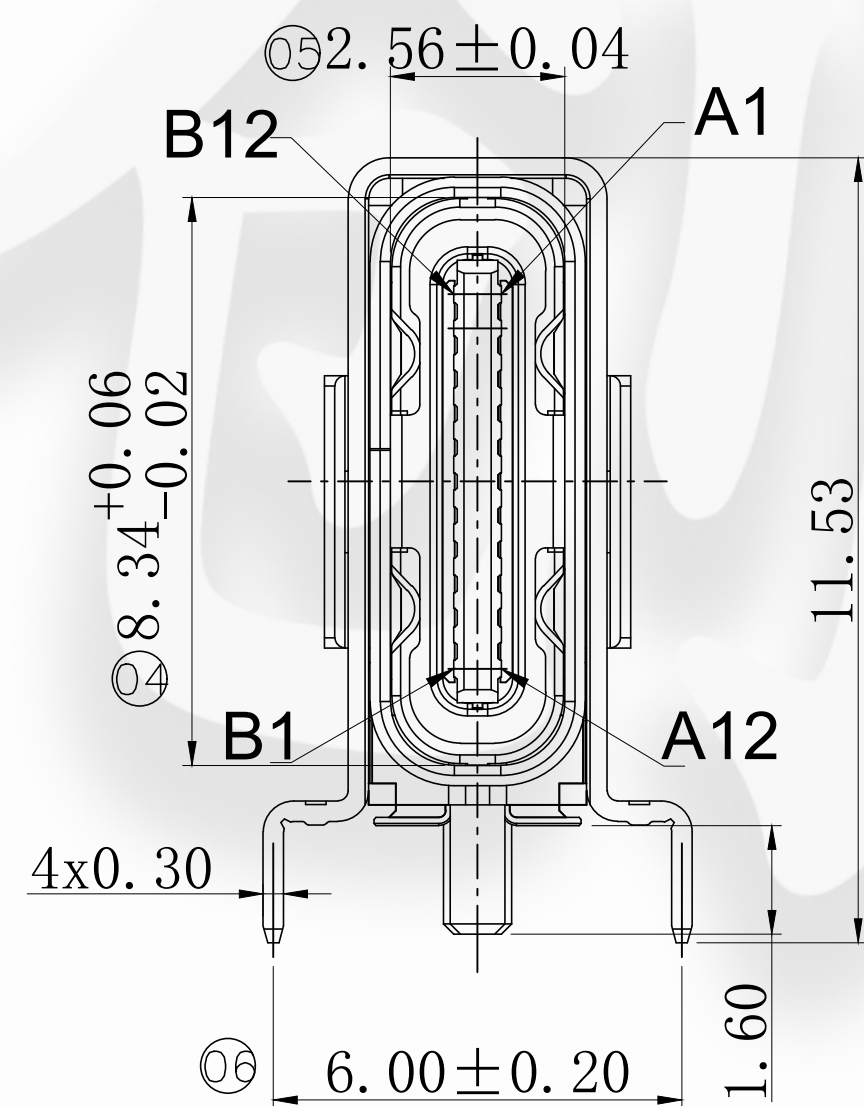

5	OUTER SHELL	STAINLESS STEEL SUS304 T=0.30	NI Plated	1PCS
4	INNER SHELL	STAINLESS STEEL SUS304,T=0.30	NI Plated	1PCS
3	MIDDLE PLATE	STAINLESS STEEL SUS301	CLEAR,NO PLATED	1PCS
2	CONTACT	COPPER ALLOY C7025 T=0.12	30u" Au PLATED ON CONTACT AREA Gold flash ON SOLDER AREA 50u" Ni UNDER PLATED OVER ALL	24PIN
1	HOUSING	HIGH TEMPERATURE PLASTIC	LCP-BK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

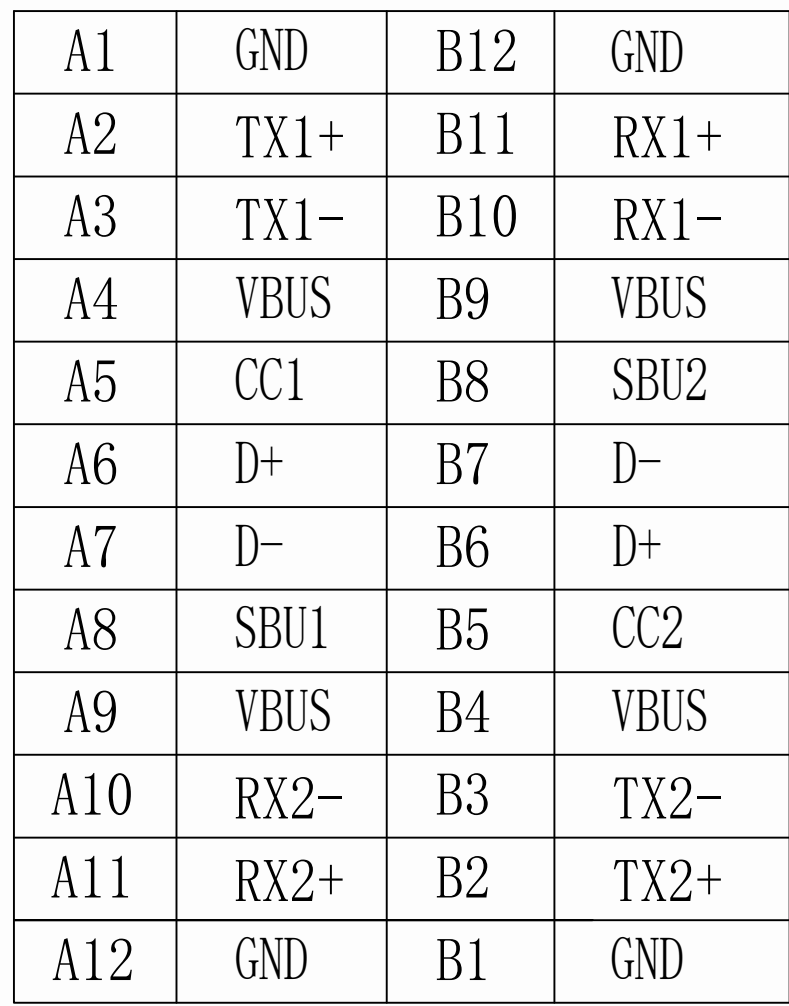

<u>CUSTOMER DRAWING</u>			铭创科技（东莞）有限公司 Mingchuang Technology (Dongguan) Co., Ltd.			
UNITS mm	SCALE 1:1	SHEET				
PROJECTION: 		DRAW: DAP	TITLE TYPE C母座24PIN 侧贴 CH=5.06 三模 有弹 USB4.0			
GENERAL TOLERANCE 0. ±0.25 0.0 ±0.20 0.00 ±0.15 0. ° ±4° 0.0 ° ±3°		CHECK: HWT				
		APPD: Peter Tan	MAT'L SEE TABLE		FINISH SEE TABLE	
			DWG. NO. 1430.TCF.CC.J25		PART NO. _____	SIZE A4