
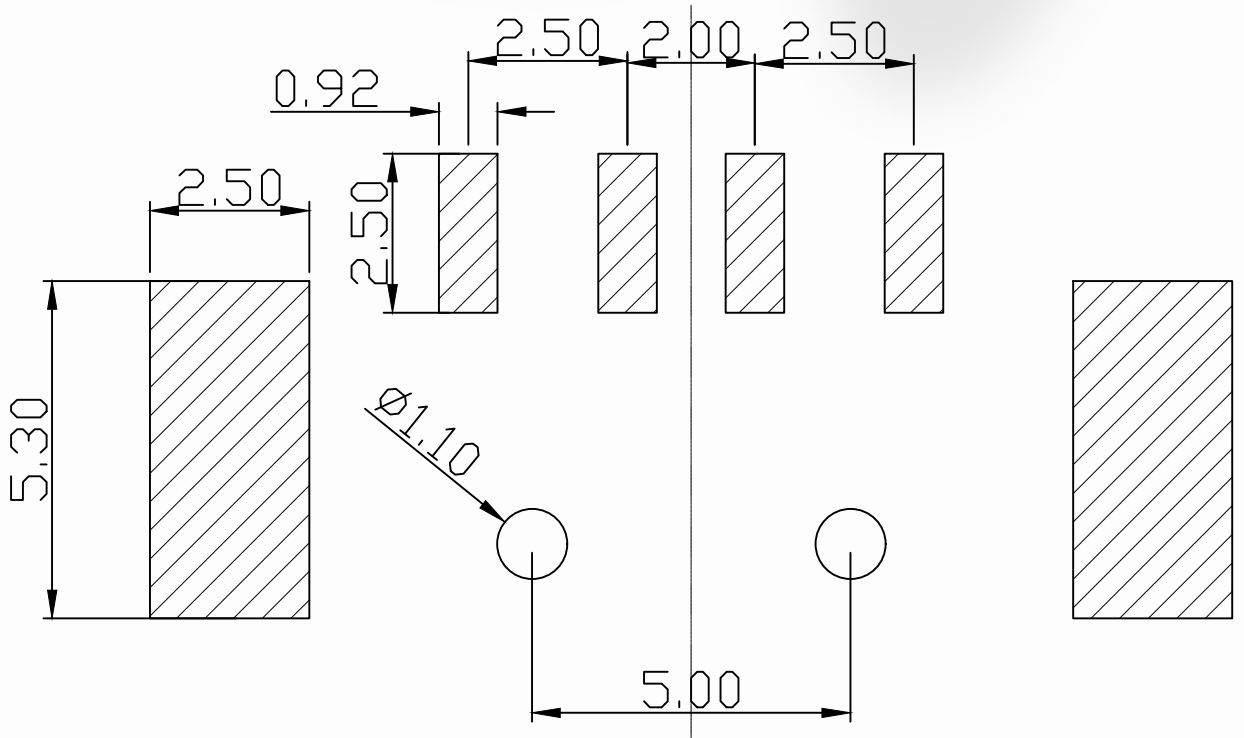
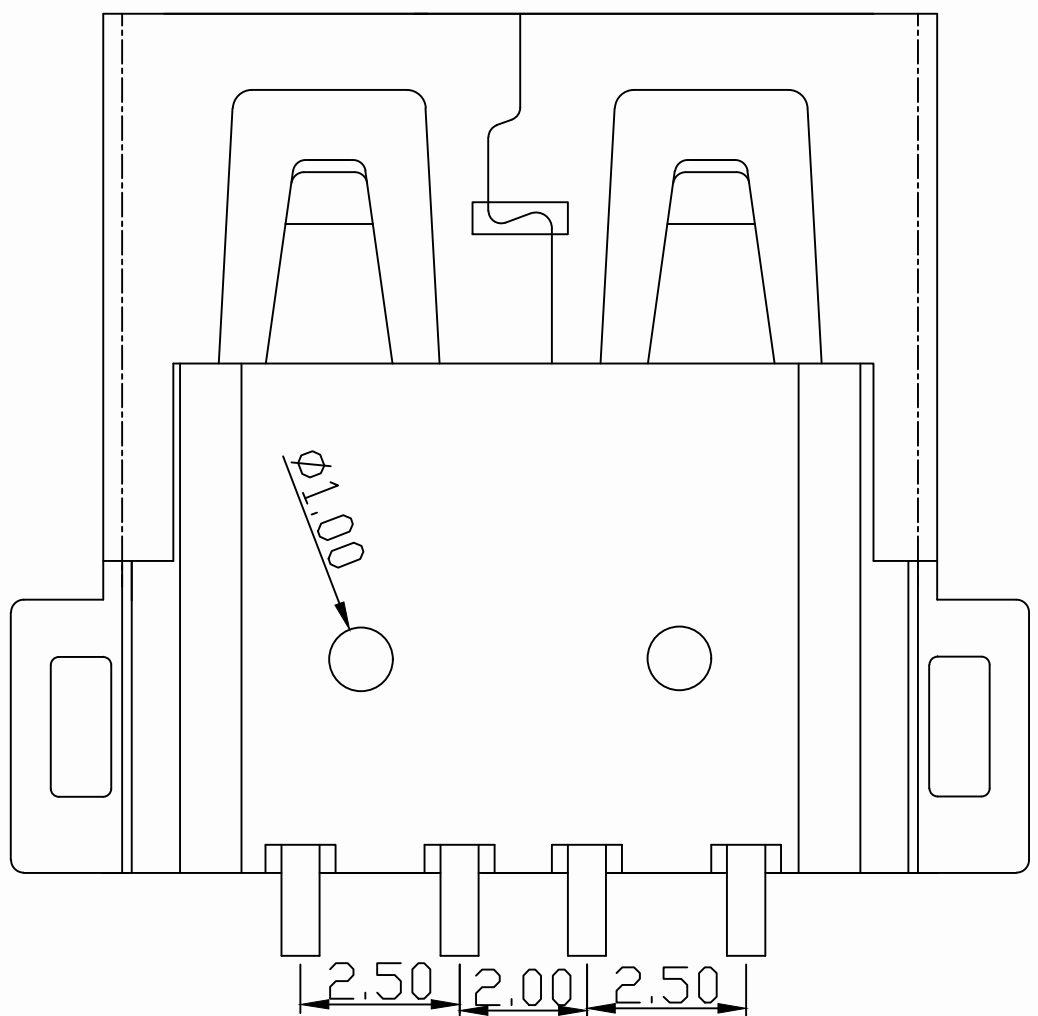
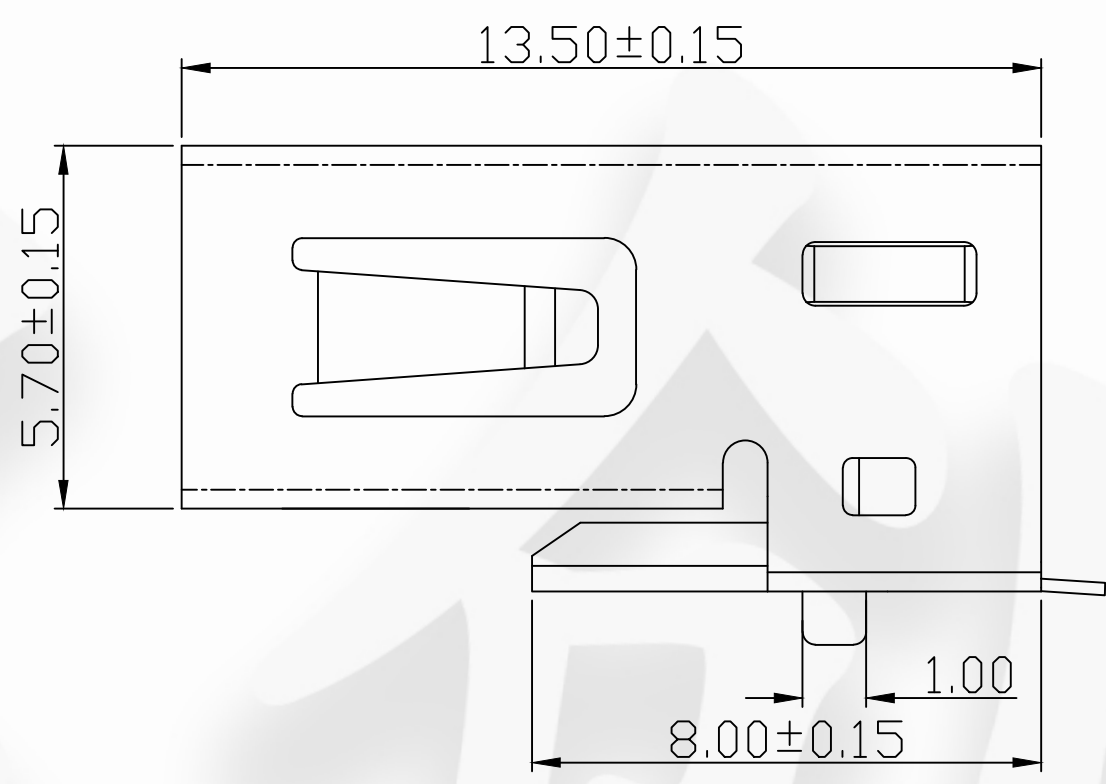
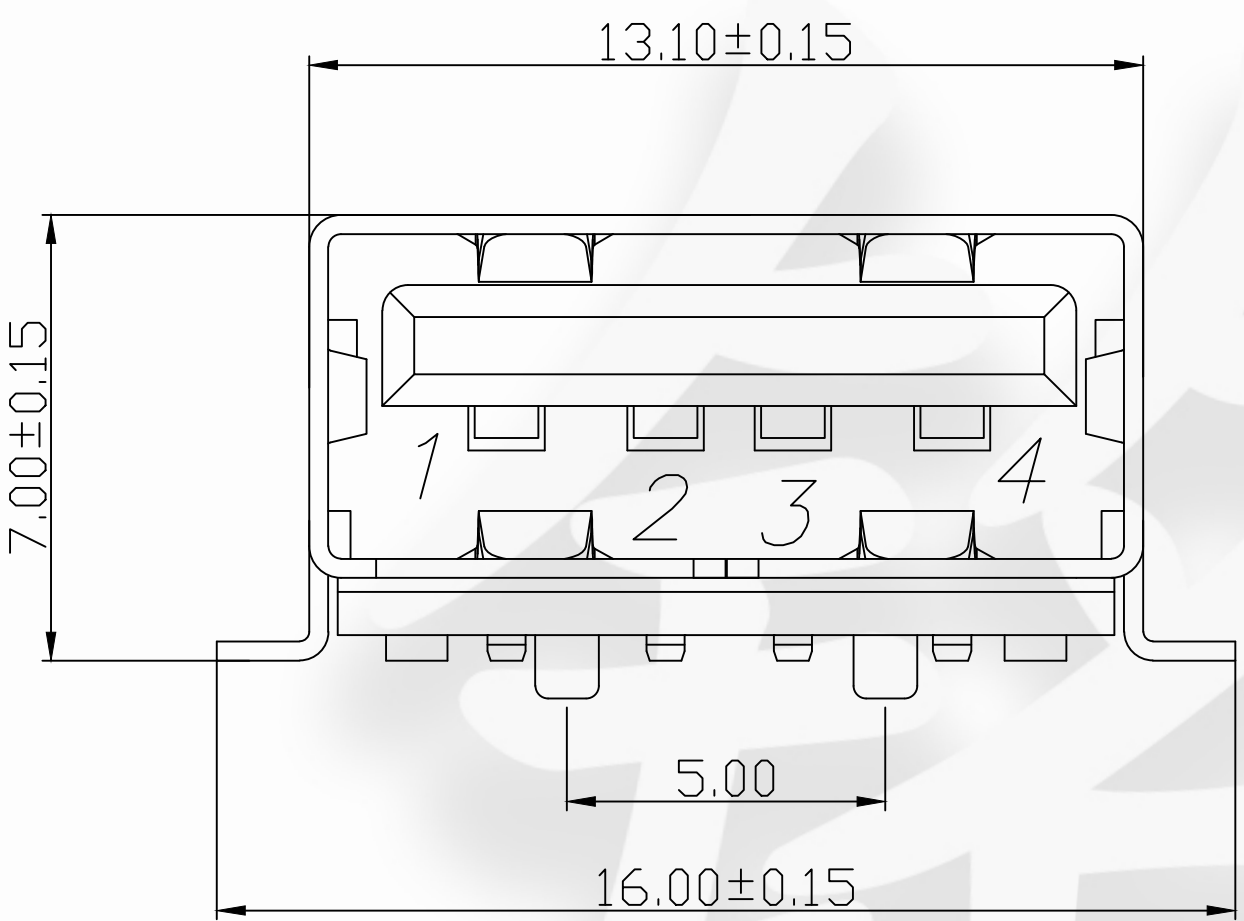


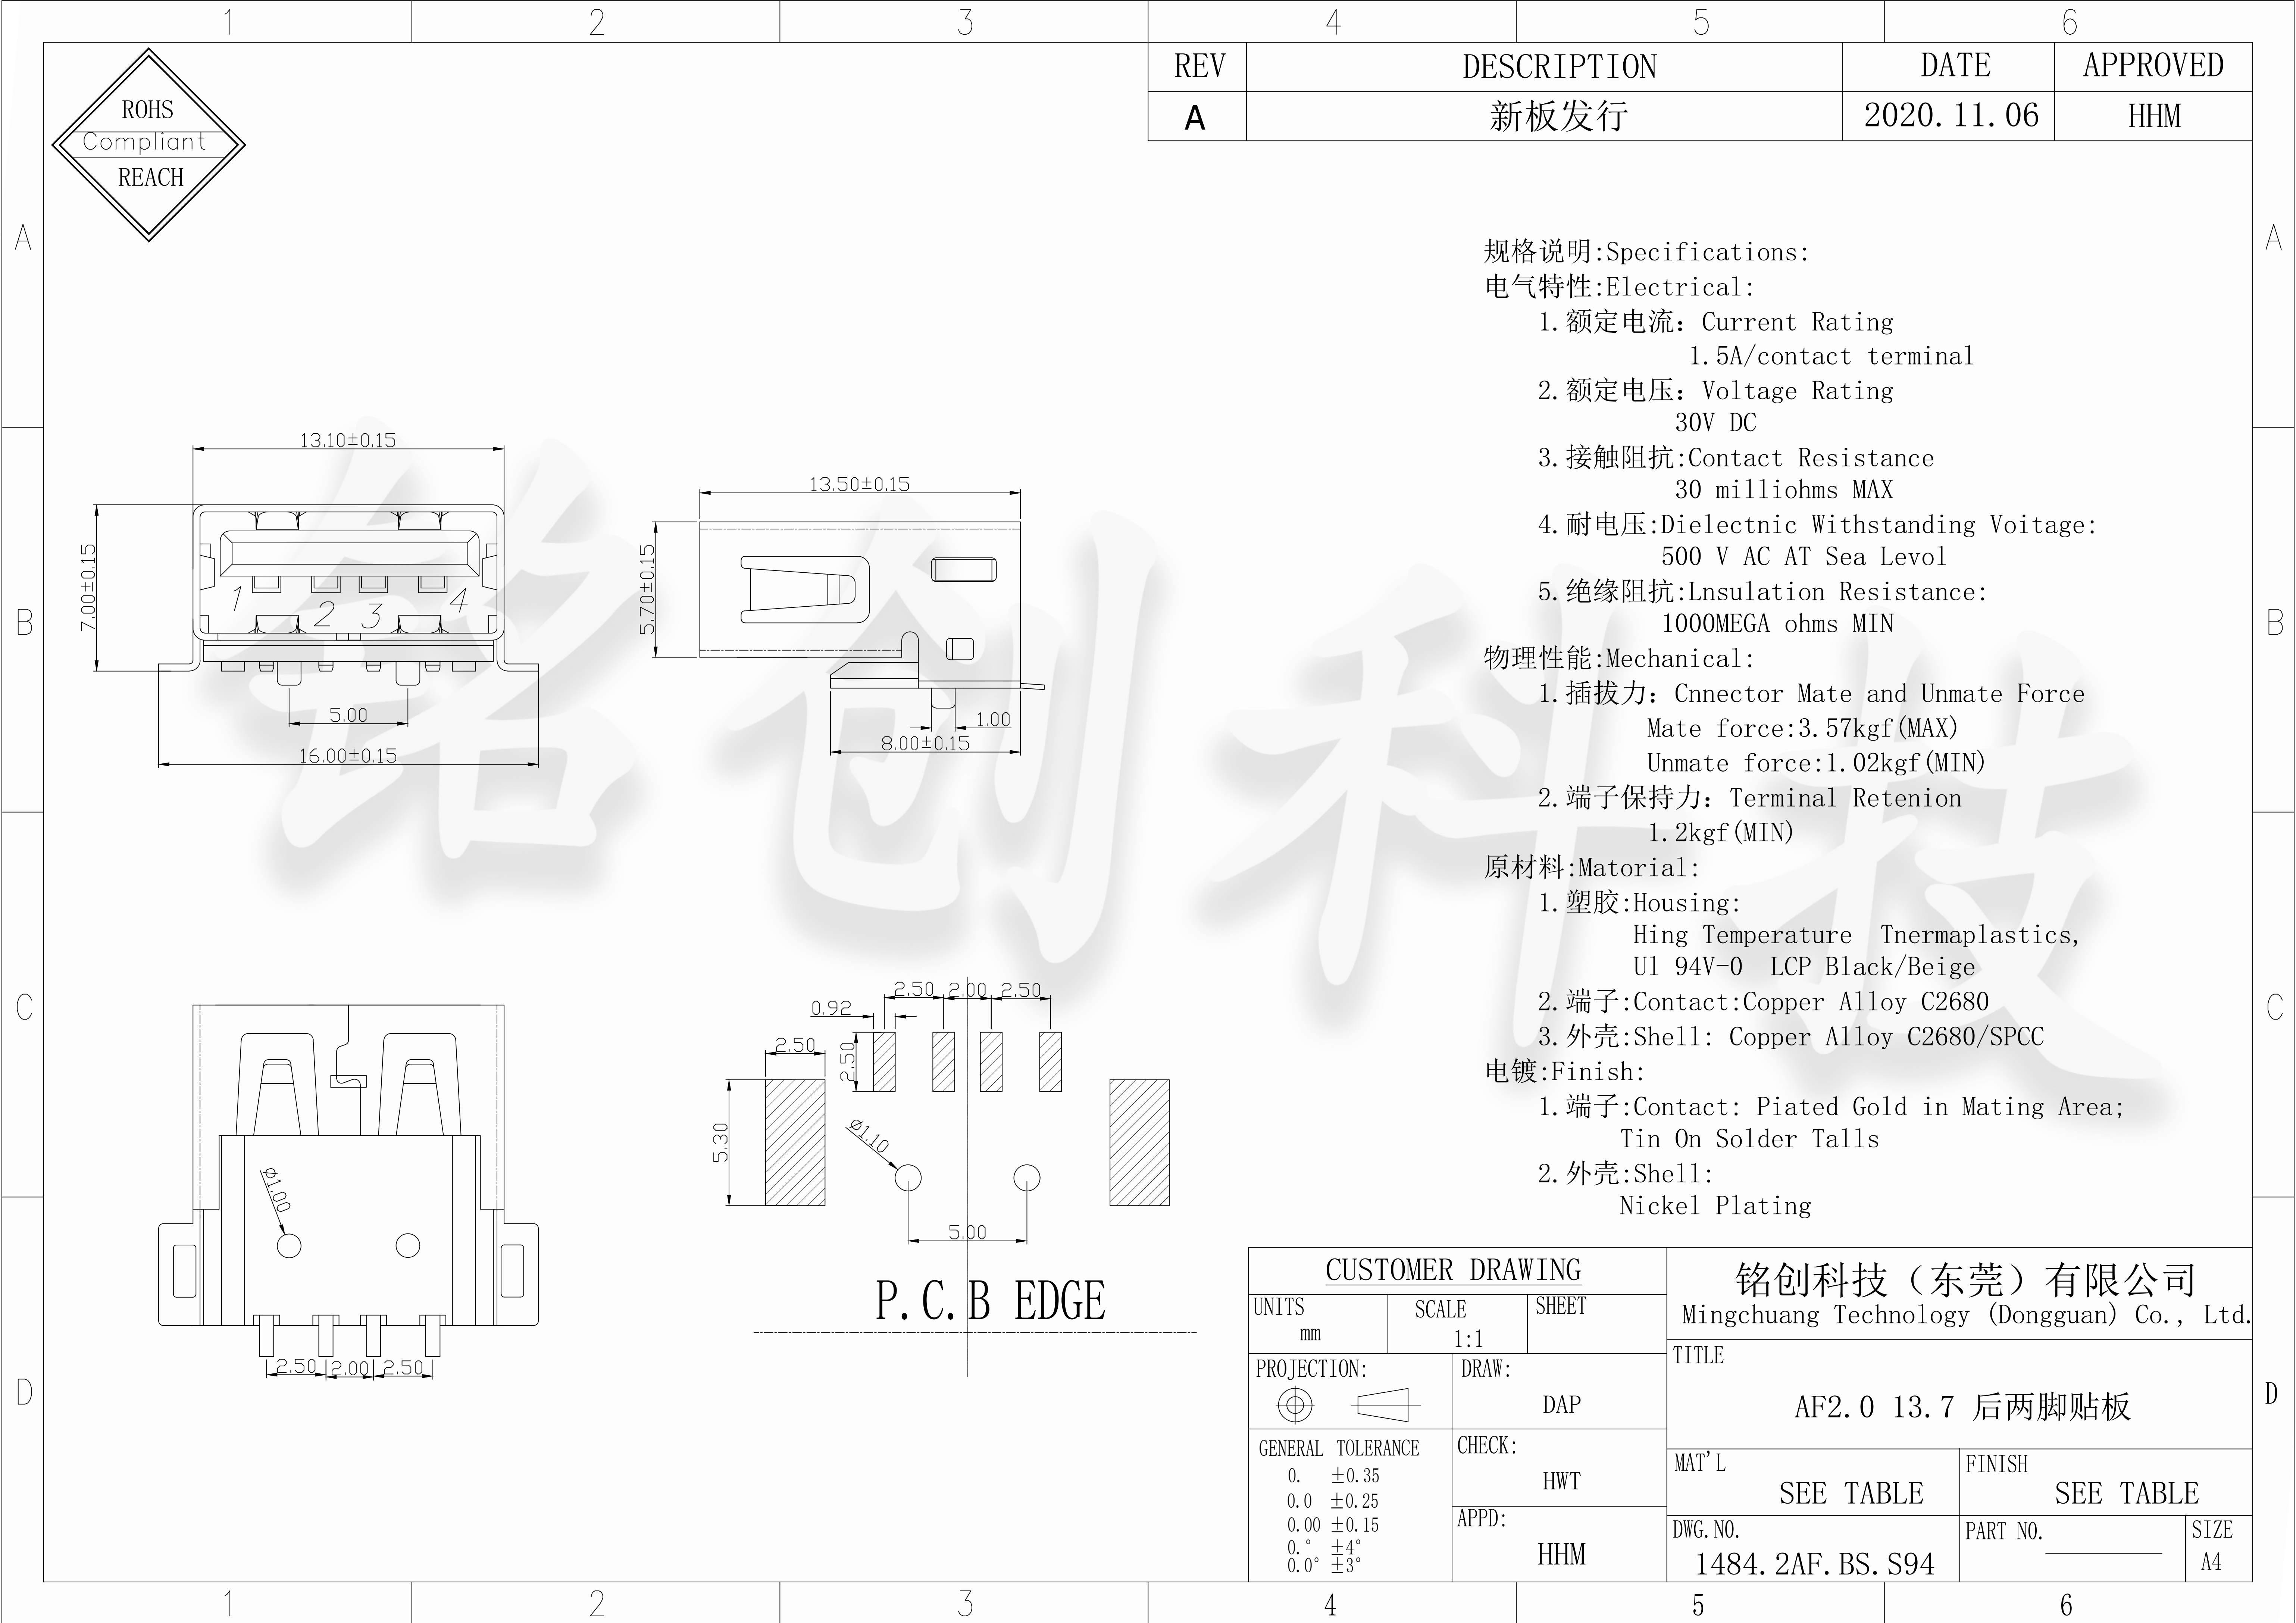

规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗:Contact Resistance
30 milliohms MAX
- 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 插拔力: Cnnector Mate and Unmate Force
Mate force:3. 57kgf (MAX)
Unmate force:1. 02kgf (MIN)
- 端子保持力: Terminal Retenion
1. 2kgf (MIN)

原材料:Matorial:

- 塑胶:Housing:
Hing Temperature Tnermaplastics,
U1 94V-0 LCP Black/Beige
- 端子:Contact:Copper Alloy C2680
- 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 外壳:Shell:
Nickel Plating

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET	Mingchuang Technology (Dongguan) Co., Ltd.		
PROJECTION: 		DRAW: DAP	TITLE AF2.0 13.7 后两脚贴板		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. 1484. 2AF. BS. S94		PART NO. _____ SIZE A4